

Panrex OEM Process



Project Management



iPanrex

PNEUMATIC FASTENING TOOLS



PANREX INDUSTRIAL CO., LTD.

No.45, Tucheng Rd., Dali Dist., Taichung City, Taiwan, 41274.

TEL: 886-4-2493-1538

FAX:886-4-2493-1539

<http://www.panrex.com.tw>

E-mail: panrex-wiichen@panrex.com.tw
panrex@hibox.hinet.net



2024.01

iPanrex


PNEUMATIC FASTENING TOOLS



INDUSTRIAL LEVEL PALLET COIL NAILER




PR-9130P Pallet Coil Nailer

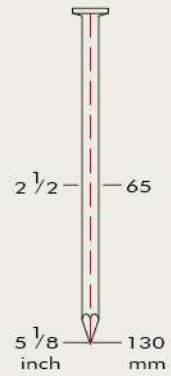

TYPE OF NAIL	Wire Welded Nails
SHANK	.099" - .150" (2.50-3.80mm)
HEAD DIA.	.256" - .338" (6.5-8.6mm)
PITCH	10.5±0.3mm
COLLATION ANGLE	15°
LENGTH	2 1/2"-5 1/8"(65-130mm)
WEIGHT	13.29lbs (6.04kg)
LOADING CAPACITY	120-300 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm²)




PR-9100EP.1 (EPAL) Pallet Coil Nailer

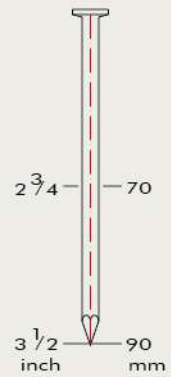

TYPE OF NAIL	Wire Welded Nails
SHANK	.150" (3.80mm)
HEAD DIA.	.338" (8.6mm)
PITCH	10.5±0.3mm
COLLATION ANGLE	15°
LENGTH	2 3/4"-3 1/2"(70-90mm)
WEIGHT	12.32lbs (5.60kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm²)




PR-8100C Pallet Coil Nailer

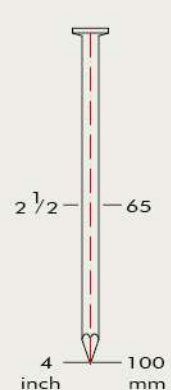

TYPE OF NAIL	Wire Welded Nails
SHANK	.099" - .150" (2.50-3.80mm)
HEAD DIA.	.256" - .295" (6.5-7.5mm)
PITCH	8.0±0.3mm
COLLATION ANGLE	15°
LENGTH	2 1/2"-4"(65-100mm)
WEIGHT	12.45lbs (5.66kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm²)



PCN-790PRO Pallet Coil Nailer

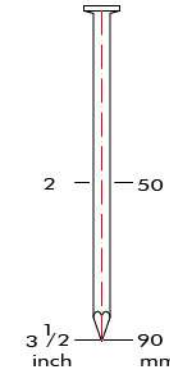


TYPE OF NAIL	Wire Welded Nails
SHANK	.099" - .150" (2.50-3.80mm)
HEAD DIA.	.283" (MAX 7.2mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	2"-3 1/2"(50-90mm)
WEIGHT	7.94lbs (3.61kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm²)

POWERFUL




PR-790P Pallet Coil Nailer

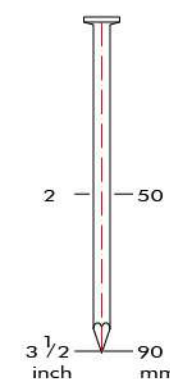

TYPE OF NAIL	Wire Welded Nails
SHANK	.099" - .150" (2.50-3.80mm)
HEAD DIA.	.236" - .295" (6.0-7.5mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	2"-3 1/2"(50-90mm)
WEIGHT	7.99lbs (3.63kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm²)



PCN-670SA.1 Pallet Coil Nailer

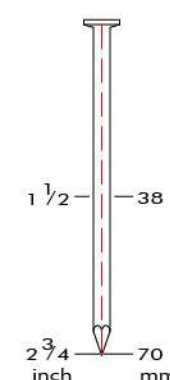


TYPE OF NAIL	Wire Welded Nails
SHANK	.092" - .131" (2.30-3.30mm)
HEAD DIA.	.220" - .275" (5.6-7.0mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1 1/2"-2 3/4"(38-70mm)
WEIGHT	6.80lbs (3.09kg)
LOADING CAPACITY	225-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm²)



INDUSTRIAL PALLET NAILER




PCN-70 Pallet Coil Nailer

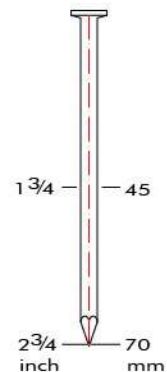

TYPE OF NAIL	Wire Welded Nails
SHANK	.092" - .118" (2.30-3.00mm)
HEAD DIA.	.220" - .275" (5.6-7.0mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1 3/4"-2 3/4"(45-70mm)
WEIGHT	7.30lbs (3.32kg)
LOADING CAPACITY	225-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

PCN-70A2 For Pallet Machine

2 SET NOSE DESIGN WITH METAL INSERT FOR REPLACE AS THE HEAD OF NOSE WEARS

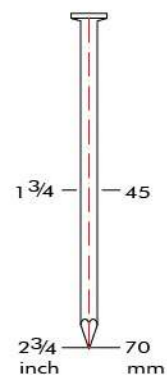

TYPE OF NAIL	Wire Welded Nails
SHANK	.092" - .118" (2.30-3.00mm)
HEAD DIA.	.220" - .275" (5.6-7.0mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1 3/4"-2 3/4"(45-70mm)
WEIGHT	7.37lbs (3.35kg)
LOADING CAPACITY	225-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




TWO SET NOSE FOR PALLET COIL NAILER (PCN-70)

PCN-70CL For Pallet Machine

New


2 SET NOSE DESIGN WITH METAL INSERT FOR REPLACE AS THE HEAD OF NOSE WEARS



TYPE OF NAIL	Wire Welded Nails
SHANK	.092" - .118" (2.30-3.00mm)
HEAD DIA.	.220" - .275" (5.6-7.0mm)
PITCH	8mm
COLLATION ANGLE	15°
LENGTH	1 3/4"(45mm)
WEIGHT	15.86lbs (7.21kg)
LOADING CAPACITY	225-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-65H.1 PRO Pallet Coil Nailer

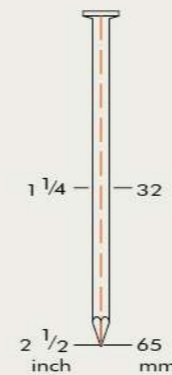

TYPE OF NAIL	Wire Welded Nails
SHANK	.092" - .113" (2.30-2.87mm)
HEAD DIA.	.283" (MAX 7.2mm)
PITCH	6.0-8.0mm
COLLATION ANGLE	15°
LENGTH	1 1/4"-2 1/2"(32-65mm)
WEIGHT	5.74lbs (2.611kg)
LOADING CAPACITY	225-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

PCN-65.1 PRO Pallet Coil Nailer




TYPE OF NAIL	Wire Welded Nails
SHANK	.083" - .099" (2.10-2.50mm)
HEAD DIA.	.244" (MAX 6.2mm)
PITCH	6.0-8.0mm
COLLATION ANGLE	15°
LENGTH	1 1/4"-2 1/2"(32-65mm)
WEIGHT	5.74lbs (2.61kg)
LOADING CAPACITY	300-350 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-55M.1 PRO Pallet Coil Nailer


Heavy Duty

Durability

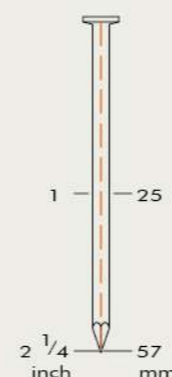

TYPE OF NAIL	Wire Welded Nails
SHANK	.083" - .099" (2.10-2.50mm)
HEAD DIA.	.189" - .236" (4.8-6.0mm)
PITCH	6.8-8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2 1/4"(25-57mm)
WEIGHT	5.48lbs (2.49kg)
LOADING CAPACITY	300-350 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

PCN-55 PRO Pallet Coil Nailer



TYPE OF NAIL	Wire Welded Nails
SHANK	.083"-0.099"(2.10-2.50mm)
HEAD DIA.	.189"-0.236"(4.8-6.0mm)
PITCH	6.8-8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2 1/4"(25-57mm)
WEIGHT	5.76lbs(2.62kg)
LOADING CAPACITY	300-350 Nails
OPERATION PRESSURE	70-120psi(4.9-8.3kg/cm ²)




INDUSTRIAL PALLET NAILER




PCN-70PAL For Pallet Machine

TYPE OF NAIL	Wire Welded Nails
SHANK	.092" - .118" (2.30-3.00mm)
HEAD DIA.	.275" (MAX 7.0mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1 3/4"-2 3/4" (45-70mm)
WEIGHT	6.01lbs (2.73kg)
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)





PCN-790PAL For Pallet Machine

TYPE OF NAIL	Wire Welded Nails
SHANK	0.099" - .150" (2.50-3.80mm)
HEAD DIA.	.283" (MAX 7.2mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	2"-3 1/2" (50-90mm)
WEIGHT	6.82lbs (3.10kg)
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-55M.1PAL PRO For Pallet Machine

TYPE OF NAIL	Wire Welded Nails
SHANK	.083" - .099" (2.10-2.50mm)
HEAD DIA.	.0189" - .236" (4.8-6.0mm)
PITCH	6.8-8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2 1/4" (25-57mm)
WEIGHT	4.73lbs (2.15kg)
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

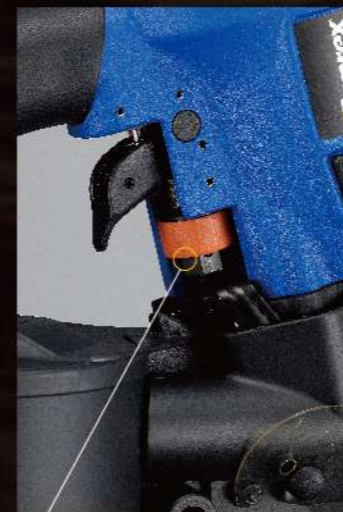

ADJUSTABLE WORK CONTACTING ELEMENT
Depth of drive adjustment by wheel. (U.S. PATENT 6866177)

ADJUSTABLE AIR DEFLECTOR

POWERFUL
Driving power: 600 inch-lbs

BUILT-IN SOUND REDUCER
Low noise and vibration

ERGONOMIC DESIGN
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size.

FAST-CYCLE RATE TO 15 NAILS/SECOND (110psi)

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.



EASY DIAL NAIL SIZE ADJUSTMENT
(R.O.C. PATENT 220112)



EXCLUSIVE NOZZLE TIP TO FIT SIDING DECKING OPERATION


APPLICATION

SIDING / FENCING / EXTERIOR TRIM / SHEATHING
SUBFLOORS / ROOF DECKING / EXTERIOR DECK
FURRING / STRAPPING

CONSTRUCTION FASTENING System

CONSTRUCTION FASTENING System


PCN-670SA Pallet Coil Nailer

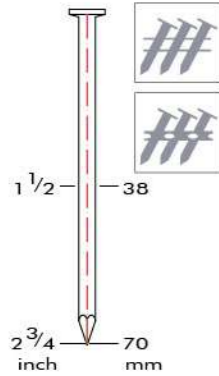

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.092" - .131" (2.30-3.30mm)
HEAD DIA.	.275" (MAX 7.0mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1 1/2"-2 3/4"(38-70mm)
WEIGHT	6.73lbs (3.06kg)
LOADING CAPACITY	225-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-790HS Pro-Coil Nailer

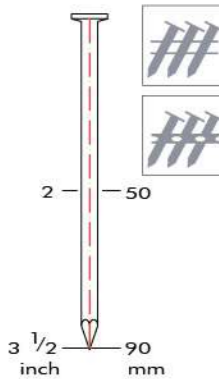

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.099" - .150" (2.50-3.80mm)
HEAD DIA.	.256" - .295" (6.5-7.5mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	2"-3 1/2"(50-90mm)
WEIGHT	7.88lbs (3.58kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-790S Pallet Coil Nailer

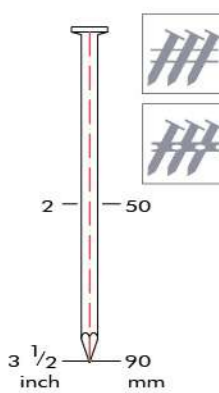

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.099" - .150" (2.50-3.80mm)
HEAD DIA.	.256" - .295" (6.5-7.5mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	2"-3 1/2"(50-90mm)
WEIGHT	8.05lbs (3.66kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-675S Pallet Coil Nailer

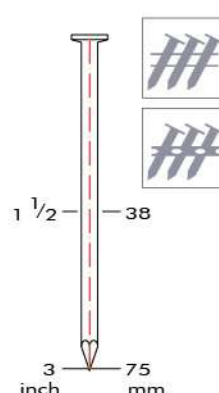

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.092" - .131" (2.30-3.30mm)
HEAD DIA.	.283" (MAX 7.2mm)
PITCH	7.6-8.0mm
COLLATION ANGLE	15°
LENGTH	1 1/2"-3"(38-75mm)
WEIGHT	6.69lbs (3.04kg)
LOADING CAPACITY	225-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-452S Conical Coil Nailer

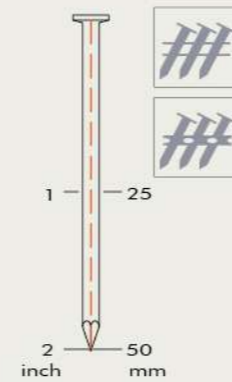

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.063" - .099" (1.59-2.50mm)
HEAD DIA.	.181" - .197" (4.6-5.0mm)
PITCH	6.0-6.8mm
COLLATION ANGLE	15°
LENGTH	1"-2"(25-50mm)
WEIGHT	4.00lbs (1.82kg)
LOADING CAPACITY	400 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3 kg/cm ²)



PCN-565H Pro-Coil Nailer

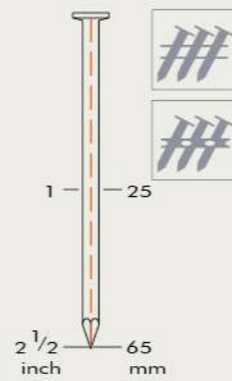

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.092" - .113" (2.30-2.87mm)
HEAD DIA.	.275" (MAX 7.0mm) Bigger Nose Head
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2 1/2"(25-65mm)
WEIGHT	5.54lbs (2.52kg)
LOADING CAPACITY	250-400 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-565S Pro-Coil Nailer



TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.092" - .113" (2.30-2.87mm)
HEAD DIA.	.197" - .236" (5.0-6.0mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2 1/2"(25-65mm)
WEIGHT	5.52lbs (2.51kg)
LOADING CAPACITY	250-400 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

PCN-557S Pro-Coil Nailer

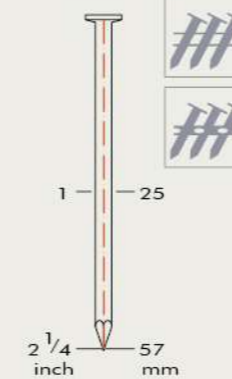


TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.083" - .092" (2.10-2.30mm)
HEAD DIA.	.189" - .236" (4.8-6.0mm)
PITCH	6.0-6.8mm
COLLATION ANGLE	15°
LENGTH	1"-2 1/4"(25-57mm)
WEIGHT	5.21lbs (2.37kg)
LOADING CAPACITY	250-400 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



CONSTRUCTION FASTENING System


PCN-557C Conical Coil Nailer

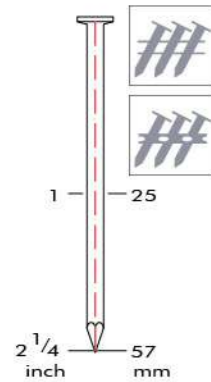

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.083" - .092" (2.10-2.30mm)
HEAD DIA.	.189" - .236" (4.8-6.0mm)
PITCH	6.0-6.8mm
COLLATION ANGLE	15°
LENGTH	1"-2 1/4"(25-57mm)
WEIGHT	5.19lbs (2.36kg)
LOADING CAPACITY	250-400 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-945P Pro-Roofing Coil Nailer

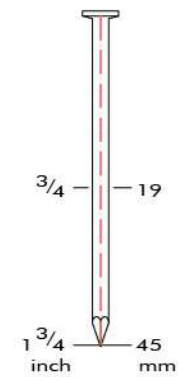

TYPE OF NAIL	Wire Welded Nails
SHANK	.120" (3.05mm)
HEAD DIA.	.394" (10.0mm)
PITCH	8.5mm
COLLATION ANGLE	15°
LENGTH	3/4"-1 3/4"(19-45mm)
WEIGHT	5.37lbs (2.44kg)
LOADING CAPACITY	120 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-945EP Pro-Roofing Coil Nailer

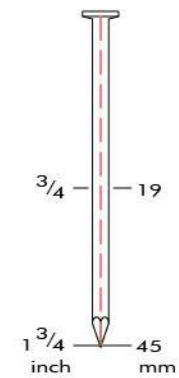

TYPE OF NAIL	Wire Welded Nails
SHANK	.165"(4.20mm)
HEAD DIA.	.406"(10.3mm)
PITCH	10.7mm
COLLATION ANGLE	15°
LENGTH	3/4"-1 3/4"(19-45mm)
WEIGHT	5.32lbs(2.42kg)
LOADING CAPACITY	120 Nails
OPERATION PRESSURE	70-120psi(4.9-8.3kg/cm ²)



PCN-32 Pro-coil Nailer

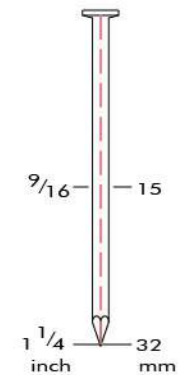

TYPE OF NAIL	Wire Welded Nails
SHANK	.079" - .086" (2.00-2.20mm)
HEAD DIA.	.169" - .189" (4.3-4.8mm)
PITCH	5.0±0.4mm
COLLATION ANGLE	0°
LENGTH	9/16"-1 1/4"(15-32mm)
WEIGHT	2.79lbs (1.27kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



SAFETY LOCK-OUT MECHANISM
Tool will not fire unless more than three nails are in the magazine

LIGHTEST WEIGHT DESIGN

POWERFUL AND EASY CAP RELEASE
(U.S.PATENT 6651863)

ADJUSTABLE WORK CONTACTING ELEMENT
Depth of drive adjustment element on the tool.

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)

ERGONOMIC DESIGN
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size




PUSHER & FOLLOWER PROTECTOR DESIGN

FRAMING FASTENING System *TOP Loading* APPLICATION

FRAMING / WALL SHEATHING / ROOF SHEATHING / FLOOR DECKING / BLOCKING SUBASSEMBLIES

FRAMING FASTENING System


TOP LOADING 21 Degree PR-22021 Pro-Framing Nailer

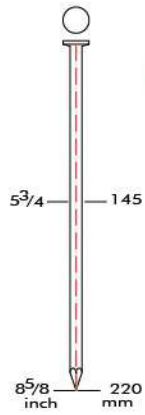

TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.150" - .197" (3.80-5.00mm)
HEAD DIA.	.362" - .386" (9.2-9.8mm)
COLLATION ANGLE	19° - 21°
LENGTH	5 3/4"-8 5/8" (145-220mm)
WEIGHT	20.53lbs (9.33kg)
LOADING CAPACITY	54 Nails
OPERATION PRESSURE	95-145psi (6.7-10.2kg/cm ²)




TOP LOADING 21 Degree PR-16021.1 Pro-Framing Nailer

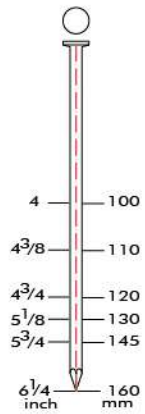

TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.150" - .197" (3.80-5.00mm)
HEAD DIA.	.354" (9.0mm)
COLLATION ANGLE	20°
LENGTH	4"-6 1/4" (100-160mm)
WEIGHT	15.66lbs (7.12kg)
LOADING CAPACITY	50 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)




TOP LOADING 21 Degree PR-13021.1 Pro-Framing Nailer

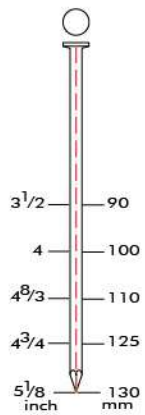

TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.113" - .161" (2.87-4.10mm)
HEAD DIA.	.323" (8.2mm)
COLLATION ANGLE	20°
LENGTH	3 1/2"-5 1/8" (90-130mm)
WEIGHT	14.17lbs (6.44kg)
LOADING CAPACITY	64 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)

TOP LOADING 21 Degree PR-9021P.1 Pro-Framing Nailer




TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.113" - .161" (2.87-4.10mm)
HEAD DIA.	.268" - .338" (6.8-8.6mm)
COLLATION ANGLE	20°
LENGTH	2"-3 1/2" (50-90mm)
WEIGHT	7.83lbs (3.56kg)
LOADING CAPACITY	54 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)




Tool free depth adjustment

TOP LOADING 21 Degree PR-0021P.1 Pro-Framing Nailer




TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.113" - .161" (2.87-4.10mm)
HEAD DIA.	.268" - .338" (6.8-8.6mm)
COLLATION ANGLE	20°
LENGTH	2 3/8"-4" (60-100mm)
WEIGHT	7.88lbs (3.58kg)
LOADING CAPACITY	61 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)

TOP LOADING 34 Degree PR-0034P.1 Pro-Framing Nailer



TYPE OF NAIL	Clipped Head Paper Collated Off Set/Full Round Head
SHANK	.113" - .150" (2.87-3.80mm)
HEAD DIA.	.299" (7.6mm)
COLLATION ANGLE	31°
LENGTH	2"-4" (50-100mm)
WEIGHT	7.81lbs (3.55kg)
LOADING CAPACITY	74 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)

TOP LOADING 17 Degree PR-9017P.1 Pro-Framing Nailer



TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.113" - .133" (2.87-3.40mm)
HEAD DIA.	.307" (7.8mm)
COLLATION ANGLE	17°
LENGTH	2"-3 1/2" (50-90mm)
WEIGHT	7.88lbs (3.58kg)
LOADING CAPACITY	55 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)



POWERFUL AND LIGHTEST
Driving power : 1100 inch-lbs

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other.(U.S. PATENT 6419140)

ERGONOMIC DESIGN
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size

REAR LOADING AND PUSHER PROTECTOR DESIGN.

FAST & EASY LOADING
By pass pusher for fast, easy one-step loading.

ADJUSTABLE WORK CONTACTING ELEMENT

SAFETY LOCK-OUT MECHANISM
Tool will not fire unless more than three nails are in the magazine

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.

APPLICATION

FRAMING / WALL SHEATHING
ROOF SHEATHING / FLOOR DECKING
/ BLOCKING SUBASSEMBLIES


FRAMING FASTENING

System *REAR LOADING*




PF-0021 P

REAR LOADING 21 Degree PF-0021 Pro-Framing Nailer




TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.113" - .161" (2.87-4.10mm)
HEAD DIA.	.299"-346" (7.6-8.8mm)
COLLATION ANGLE	20°
LENGTH	2" - 4" (50-100mm)
WEIGHT	8.14lbs (3.70kg)
LOADING CAPACITY	58 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)

REAR LOADING 21 Degree PF-9021 Pro-Framing Nailer



TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.113" - .131" (2.87-3.30mm)
HEAD DIA.	.268"-315" (6.8-8.0mm)
COLLATION ANGLE	20°
LENGTH	2" - 3 1/2" (50-90mm)
WEIGHT	8.03lbs (3.65kg)
LOADING CAPACITY	59 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)

REAR LOADING 34 Degree PF-0034 Pro-Framing Nailer



TYPE OF NAIL	Clipped Head Paper Collated Off Set/Full Round Head
SHANK	.113" - .150" (2.87-3.80mm)
HEAD DIA.	.299"(7.6mm)
COLLATION ANGLE	31°
LENGTH	2" - 4" (50-100mm)
WEIGHT	7.83lbs (3.56kg)
LOADING CAPACITY	68 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)



FRAMING FASTENING System

PCN-790S

Framing Coil Nailer

	TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
	SHANK	.099" - .150" (2.50-3.80mm)
	HEAD DIA.	.256" - .295" (6.5-7.5mm)
	PITCH	8.0mm
	COLLATION ANGLE	15°
	LENGTH	2"-3 1/2" (50-90mm)
	WEIGHT	8.05lbs (3.66kg)
	LOADING CAPACITY	150-300 Nails
	OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-790HS

Framing Coil Nailer


	TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
	SHANK	.099" - .150" (2.50-3.80mm)
	HEAD DIA.	.256" - .295" (6.5-7.5mm)
	PITCH	8.0mm
	COLLATION ANGLE	15°
	LENGTH	2"-3 1/2" (50-90mm)
	WEIGHT	7.88lbs (3.58kg)
	LOADING CAPACITY	150-300 Nails
	OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



Easy Side Loading

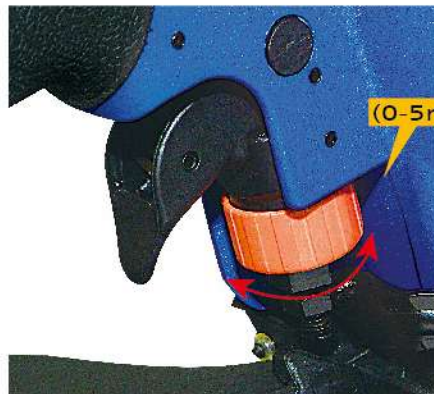

Tool Free Depth Adjustment

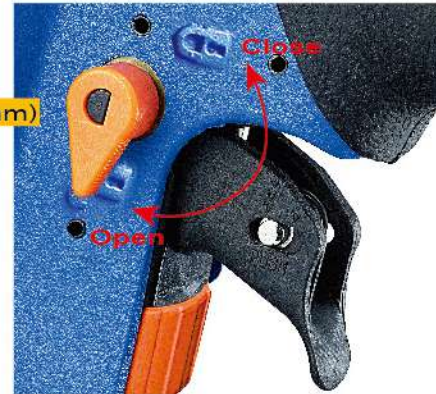

Safety Trigger Lock Level

POWERFUL AND PATENTED DRIVER DESIGN FOR DURABLE USE

LOW NOISE AND LOW VIBRATION

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:

No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)

ERGONOMIC DESIGN

Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size

LIGHTEST WEIGHT DESIGN ONLY 4.8lbs(2.18kg)

FAST-CYCLE RATE TO 15 NAILS/SECOND (110Psi)

ADJUSTABLE WORK CONTACTING ELEMENT

Depth of drive adjustment element on the tool.


DURABLE AND RELIABLE

Rugged design will stand up to the demands of the job in any kind of weather.

FOR FLOORING TIP

ONE STEP JAM CLEARANCE (PATENT PENDING)

EASY LOADING AND PUSHER PROTECTOR DESIGN (PATENT PENDING)

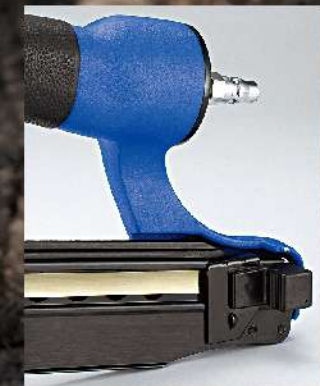

SLIM SAFETY LEVER FOR SELECT

APPLICATION

SHEATHING / SUBFLOORING / ROOF DECKING FURNITURE FRAMES / PALLETS / VINYL SIDING CRATE AND BOX ASSEMBLY


INDUSTRIAL STAPLERS

INDUSTRIAL STAPLERS




(TWO IN ONE)
PR-15864Q
Pro-Medium Crown Stapler

For Flooring Tip

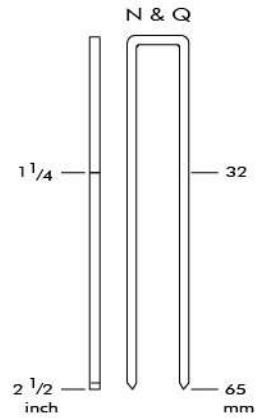

	N Type Staples	Q Type Staples
TYPE OF NAIL	N Type Staples	Q Type Staples
GAUGE SIZE	16GA.	15GA.
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm)	.075" x .067" (1.90x1.70mm)
CROWN SIZE	13/32"-7/16" (10.6-11.2mm)	7/16" (11.2mm)
COLLATION ANGLE	0°	0°
LENGTH	1 1/4"-2 1/2"(32-65mm)	1 1/4"-2 1/2"(32-65mm)
WEIGHT	5.92lbs (2.69kg)	5.92lbs (2.69kg)
LOADING CAPACITY	147 Staples	127 Staples
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)	80-120psi (5.5-8.3kg/cm ²)

PS-2540S2/PS-2540S2R
1" Wide Crown Stapler

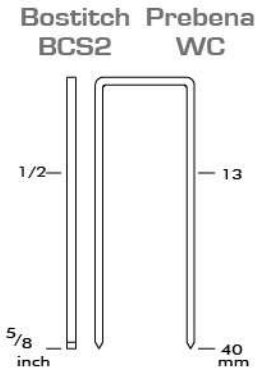


	Wire Crown Staples
TYPE OF NAIL	Wire Crown Staples
GAUGE SIZE	16GA.
WIDTH X THICKNESS	.055" x .063" (1.40x1.60mm)
CROWN SIZE	3 1/32" - 1"(24.77-25.40mm)
COLLATION ANGLE	0°
LENGTH	1/2"-1 5/8"(13-40mm)
WEIGHT	4.97lbs (2.26kg)
LOADING CAPACITY	147 Staples
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PS-2540S2.1
1" Wide Crown Stapler

New **Compact Design**

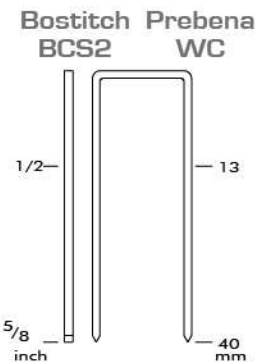


	Wire Crown Staples
TYPE OF NAIL	Wire Crown Staples
GAUGE SIZE	16GA.
WIDTH X THICKNESS	.055"x.063"(1.40x1.60mm)
CROWN SIZE	3 1/32"-1"(24.77-25.40mm)
COLLATION ANGLE	0°
LENGTH	1/2"-1 5/8"(13-40mm)
WEIGHT	4.84lbs (2.20kg)
LOADING CAPACITY	147 Staples
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



Medium Crown & Narrow Crown


PS-16851C/PS-16851-AUTO
(with Remote Fire Valve Asm.)
Pro-medium Crown Stapler

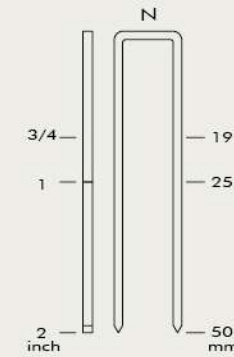

TYPE OF NAIL	Medium Crown Staples
GAUGE SIZE	16GA.
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm)
CROWN SIZE	13/32"-7/16" (10.6-11.2mm)
COLLATION ANGLE	0°
LENGTH	3/4"-2"(19-50mm)
WEIGHT	4.91lbs (2.23kg)
LOADING CAPACITY	147 Staples
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)




PR-16851P
Pro-Medium Crown Stapler

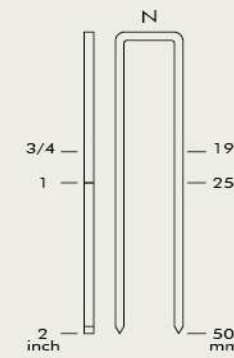

TYPE OF NAIL	Medium Crown Staples
GAUGE SIZE	16GA.
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm)
CROWN SIZE	13/32"-7/16" (10.6-11.2mm)
COLLATION ANGLE	0°
LENGTH	3/4"-2"(19-50mm)
WEIGHT	4.66lbs (2.12kg)
LOADING CAPACITY	147 Staples
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)




PS-16951C-1
Pro-Medium Crown Stapler



TYPE OF NAIL	Medium Crown Staples
GAUGE SIZE	16GA.
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm)
CROWN SIZE	15/32"-1/2" (12.2-12.7mm)
COLLATION ANGLE	0°
LENGTH	1"-2"(25-50mm)
WEIGHT	4.73lbs (2.15kg)
LOADING CAPACITY	147 Staples
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)



PR-16951P
Pro-Medium Crown Stapler



TYPE OF NAIL	Medium Crown Staples
GAUGE SIZE	16GA.
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm)
CROWN SIZE	15/32"-1/2" (12.2-12.7mm)
COLLATION ANGLE	0°
LENGTH	1"-2"(25-50mm)
WEIGHT	4.91lbs (2.23kg)
LOADING CAPACITY	147 Staples
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)




INDUSTRIAL STAPLERS

Medium Crown & Narrow Crown

PR-1440B

Industrial Medium Crown Stapler

TYPE OF NAIL	Medium Crown Staples
GAUGE SIZE	16&17GA.
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm) .057" x .051" (1.45x1.30mm)
CROWN SIZE	13/32" - 7/16" (10.5-11.2mm)
COLLATION ANGLE	0°
LENGTH	3/4"-1 5/8" (19-40mm)
WEIGHT	3.56lbs (1.62kg)
LOADING CAPACITY	130 Staples
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

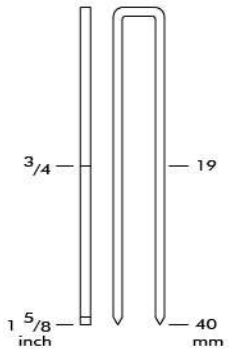


PR-9040S.1

New

Light Weight Narrow Crown Stapler


TYPE OF NAIL	Narrow Crown Staples
GAUGE SIZE	18 GA.
WIDTH X THICKNESS	.050" x .039" (1.25 x 1.00mm)
CROWN SIZE	7/32" (5.8mm)
COLLATION ANGLE	0°
LENGTH	1/2"-1 5/8" (12-40mm)
WEIGHT	3.50lbs (1.59kg)
LOADING CAPACITY	158 Staples
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

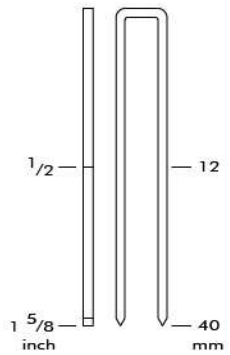

PR-9040B

Industrial Narrow Crown Stapler

TYPE OF NAIL	Narrow Crown Staples
GAUGE SIZE	18GA.
WIDTH X THICKNESS	.050" x .039" (1.25x1.00mm)
CROWN SIZE	7/32" (5.8mm)
COLLATION ANGLE	0°
LENGTH	1/2"-1 5/8" (12-40mm)
WEIGHT	3.39lbs (1.54kg)
LOADING CAPACITY	215 Staples
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

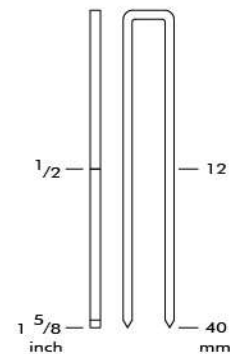


INDUSTRIAL STAPLERS

Narrow Crown & Fine Wire

PR-9040P

Light Weight Narrow Crown Staples


TYPE OF NAIL	Narrow Crown Staples
GAUGE SIZE	18GA.
WIDTH X THICKNESS	.050" x .039" (1.25x1.00mm)
CROWN SIZE	7/32" (5.8mm)
COLLATION ANGLE	0°
LENGTH	1/2"-1 5/8" (12-40mm)
WEIGHT	2.66lbs (1.21kg)
LOADING CAPACITY	100 Staples
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

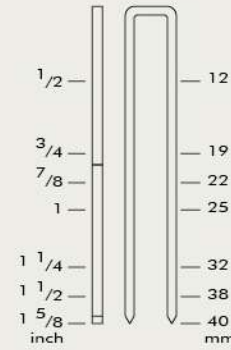

PR-9240B

Industrial Narrow Crown Stapler


TYPE OF NAIL	Narrow Crown Staples
GAUGE SIZE	18GA.
WIDTH X THICKNESS	.050" x .041" (1.27x1.05mm)
CROWN SIZE	5/16"-11/32" (8.6-8.85mm)
COLLATION ANGLE	0°
LENGTH	1/2"-1 5/8" (12-40mm)
WEIGHT	3.32lbs (1.51kg)
LOADING CAPACITY	175 Staples
OPERATION PRESSURE	70 - 120 psi (4.9-8.3kg/cm ²)

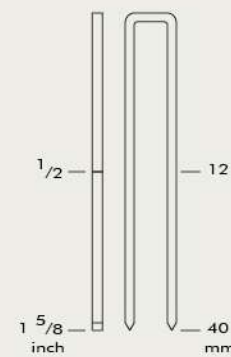

PR-9240P

Light Weight Narrow Crown Stapler

TYPE OF NAIL	Narrow Crown Staples
GAUGE SIZE	18GA.
WIDTH X THICKNESS	.050" x .039" (1.25x1.00mm)
CROWN SIZE	5/16"-11/32" (8.6-8.85mm)
COLLATION ANGLE	0°
LENGTH	1/2"-1 5/8" (12-40mm)
WEIGHT	2.62lbs (1.19kg)
LOADING CAPACITY	190 Staples
OPERATION PRESSURE	70 - 120 psi (4.9-8.3kg/cm ²)

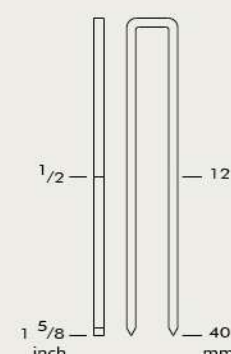

INDUSTRIAL STAPLERS


Fine Wire



8016A / 8016ALM

Fine Wire Stapler With Rapid Fire Design


MODEL	8016A	8016ALM
GAUGE SIZE	21GA	21GA
WIDTH X THICKNESS	037" x .026" (0.95x0.65mm)	037" x .026" (0.95x0.65mm)
CROWN SIZE	1/2" (12.9mm)	1/2" (12.9mm)
LENGTH	3/16"-5/8" (5-16mm)	3/16"-5/8" (5-16mm)
WEIGHT	1.98lbs (0.90kg)	2.64lbs (1.20kg)
LOADING CAPACITY	100 Staples	270 Staples
OPERATION PRESSURE	70-100psi (4.9-7.0kg/cm ²)	70-100psi (4.9-7.0kg/cm ²)



7116A / 7116ALM

Fine Wire Stapler With Rapid Fire Design

MODEL	7116A	7116ALM
GAUGE SIZE	22GA	22GA
WIDTH X THICKNESS	.030" x .024" (0.75x0.6mm)	.030" x .024" (0.75x0.6mm)
CROWN SIZE	11/32" (9.1mm)	11/32" (9.1mm)
LENGTH	3/16"-5/8" (5-16mm)	3/16"-5/8" (5-16mm)
WEIGHT	1.98lbs (0.90kg)	2.64lbs (1.20kg)
LOADING CAPACITY	150 Staples	400 Staples
OPERATION PRESSURE	70-100psi (4.9-7.0kg/cm ²)	70-100psi (4.9-7.0kg/cm ²)



ADJUSTABLE AIR DEFLECTOR

BUILT-IN SOUND REDUCER
Low noise and vibration

ANTI-DOUBLE FIRE MECHANISM,
SINGLE OR CONTACT FIRING:
No adjustment needed to switch
from one to the other. (U.S. PATENT 6419140)

DUAL POSITION
BELT HOOK

PATENTED
DRIVER DESIGN
FOR DURABLE USE

PR-1850F 18GA. FINISH NAILER 20-50MM (3/4"-2")
WARNING
 *READ OPERATION MANUAL BEFORE USING TOOL.
 *BEFORE USING TOOL, OPERATOR AND OTHERS IN WORK AREA SHOULD ALWAYS WEAR SAFETY GLASSES.
 *DISCONNECT AIR WHEN CLEANING A JAM, CONTACT TIP REPLACEMENT, SERVICING OR TOOL NOT IN USE.
 *KEEP FINGERS OFF TRIGGER WHEN NOT DRIVING FASTENERS.
 *DO NOT USE BOTTLED OR COMBUSTIBLE GASES (OXYGEN, ACETYLENE, ETC.)
 *DO NOT USE THE TOOL WHICH IS DEFECTIVE OR PERFORMS ABNORMALLY.
 *DO NOT USE THE TOOL WHICH IS DEFECTIVE OR PERFORMS ABNORMALLY.
 Max. 8bar/120psi
 MADE IN TAIWAN

NAIL-DRIVING WITH
SAFETY DEVICE:
Slim nose easy aim
(U.S. PATENT 6450387)

QUICK AND EASY
SIDE LOADING

NO-MAR RUBBER TIP
FOR PERFECT FINISH

DEPTH-OF-DRIVE
ADJUSTMENT
(U.S. PATENT 6866177)

BRADDER/ PIN NAILER System


APPLICATION

DOOR AND WINDOW CASING / PANEL ASSEMBLY
 FURNITURE FRAMES TRIM / INTERIOR AND EXTERIOR TRIM
 BUTT JOINTS CABINETS

UNIQUE DRY-FIRE
LOCK DESIGN
(U.S. PATENT 7004368)

BRADDER/PIN NAILER System

PR-1664 PRO 16GA. Finish Nailer




TYPE OF NAIL	Finish Nails
GAUGE SIZE	16GA
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm)
HEAD DIA.	.118" (3.0mm)
COLLATION ANGLE	0°
LENGTH	3/4"-2 1/2" (19-65mm)
WEIGHT	3.63lbs (1.65kg)
LOADING CAPACITY	105 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

POWERFUL



(UP TO 50MM FINISH NAILER)


PR-1650 16GA. Finish Nailer



TYPE OF NAIL	Finish Nails
GAUGE SIZE	16GA
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm)
HEAD DIA.	.118" (3.0mm)
COLLATION ANGLE	0°
LENGTH	9/16"-2" (15-50mm)
WEIGHT	2.88lbs (1.31kg)
LOADING CAPACITY	87 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-1850F 18GA. Finish Nailer




TYPE OF NAIL	Finish Nails
GAUGE SIZE	18GA
WIDTH X THICKNESS	.050" x .039" (1.25x1.00mm)
HEAD DIA.	.075" (1.9mm)
COLLATION ANGLE	0°
LENGTH	9/16"-2" (15-50mm)
WEIGHT	2.90lbs (1.32kg)
LOADING CAPACITY	110 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-1850 (with Quick Jam Release) 18GA. Finish Nailer


New



TYPE OF NAIL	Finish Nails
GAUGE SIZE	18GA
WIDTH X THICKNESS	.050" x .039" (1.25x1.00mm)
HEAD DIA.	.075" (1.9mm)
COLLATION ANGLE	0°
LENGTH	9/16"-2" (15-50mm)
WEIGHT	2.95lbs (1.34kg)
LOADING CAPACITY	110 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PR-1845 18GA. Finish Nailer

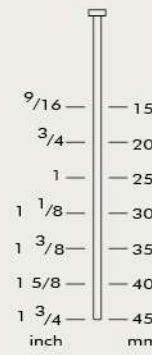

TYPE OF NAIL	Finish Nails
GAUGE SIZE	18GA.
WIDTH X THICKNESS	.050" x .039" (1.25x1.00mm)
HEAD DIA.	.075" (1.9mm)
COLLATION ANGLE	0°
LENGTH	9/16"-1 3/4" (15-45mm)
WEIGHT	2.27lbs (1.03kg)
LOADING CAPACITY	135 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PR-2145S Combination Finish Nailer - Professional Type

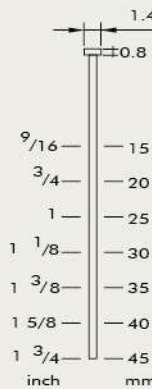

TYPE OF NAIL	Mini Tip Nails
GAUGE SIZE	21GA.
SHANK	.033" (0.84mm)
HEAD DIA.	.055" (1.4mm)
COLLATION ANGLE	0°
LENGTH	9/16"-1 3/4" (15-45mm)
WEIGHT	2.42lbs (1.10kg)
LOADING CAPACITY	165 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PR-2345S 23GA. Pin Nailer



TYPE OF NAIL	Pins
GAUGE SIZE	23GA.
SHANK	.025" (0.64mm)
HEAD DIA.	.031" (0.8mm)
COLLATION ANGLE	0°
LENGTH	9/16"-1 3/4" (15-45mm)
WEIGHT	2.46lbs (1.12kg)
LOADING CAPACITY	200 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

PR-1565DA 34° 2-1/2" DA Nailer

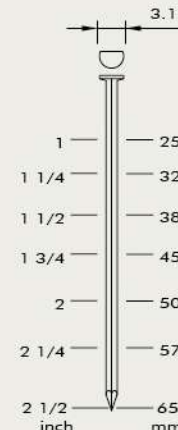

TYPE OF NAIL	DA Nails
GAUGE SIZE	15GA.
WIDTH X THICKNESS	.075" x .063" (1.90x1.60mm)
HEAD DIA.	.122" (3.1mm)
COLLATION ANGLE	34°
LENGTH	1"-2 1/2" (25-65mm)
WEIGHT	3.59lbs (1.63kg)
LOADING CAPACITY	148 Angled Brads
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




BRADDER/PIN NAILER System




PR-1550A 26° Angled Bradder

TYPE OF NAIL	Angled Brads
GAUGE SIZE	15 GA.
WIDTH X THICKNESS	.075"x.063" (1.90x1.60mm)
HEAD DIA.	.122"-.133"(3.1-3.4mm)
COLLATION ANGLE	26°
LENGTH	3/4"-2"(20-50mm)
WEIGHT	2.93lbs(1.33kg)
LOADING CAPACITY	100 Angled Brads
OPERATION PRESSURE	70-120psi(4.9-8.3kg/cm ²)

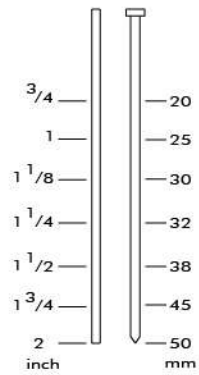

PR-1650A 26° Angled Bradder

TYPE OF NAIL	Angled Brads
GAUGE SIZE	16GA.
WIDTH X THICKNESS	.063" x .055" (1.60x1.40mm)
HEAD DIA.	.118"(3.0mm)
COLLATION ANGLE	26°
LENGTH	3/4"-2" (20-50mm)
WEIGHT	2.95lbs (1.34kg)
LOADING CAPACITY	100 Angled Brads
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

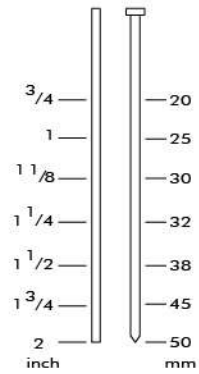

PR-1850A 26° Angled Bradder

TYPE OF NAIL	Angled Brads
GAUGE SIZE	18GA.
WIDTH X THICKNESS	.050" x .039" (1.25x1.00mm)
HEAD DIA.	.075"(1.9mm)
COLLATION ANGLE	26°
LENGTH	3/4"-2" (20-50mm)
WEIGHT	2.95lbs (1.34kg)
LOADING CAPACITY	128 Angled Brads
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

FLOORING FASTENING System

APPLICATION HARDWOOD FLOORING



COMFORTABLE GRIP DESIGN

AVAILABLE WITH LONG OR SHORT HANDLE

HIGH-SPEED, MALLET-ACTUATED PNEUMATIC OPERATION INCREASES

PRODUCTIVITY OVER MANUALLY-OPERATED TOOLS

ANGLED FITTING PREVENT HOSE FROM INTERFERING MAGAZINE OR OPERATOR.

SPECIAL MAGAZINE DESIGN. FOR EASY LOADING AND OPERATION

STRONG, LIGHT WEIGHT, ONLY 8.8~9lbs

PATENTED INSIDE PARTS DESIGN FOR DURABLE AND SAFE OPERATION (U.S. PATENT: 7213735) (AU.2007214318)



PRECISELY DRIVES STAPLES OR FLOORING CLEATS AT PROPER ANGLE AND DEPTH

SPECIAL MAGAZINE DESIGN. FOR EASY LOADING AND OPERATION

EXTRA-WIDE COMPOSITE BASE PLATE FOR ADDED STABILITY.

MALLET AND SERVICE PARTS BAG INCLUDED

ACCESSORY

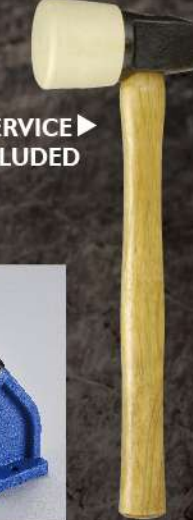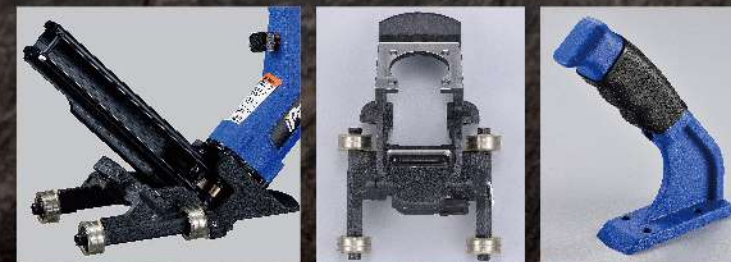


FLOORING FASTENING System



PR-9040FL2

18-Gauge Engineered Flooring Stapler


TYPE OF NAIL	Narrow Crown Staples
GAUGE SIZE	18GA.
WIDTH X THICKNESS	0.50"x.039" (1.25x1.00mm)
CROWN SIZE	7/32" (5.8mm)
COLLATION ANGLE	0°
LENGTH	1/2"-1 5/8" (12-40mm)
WEIGHT	3.85lbs (1.75kg)
LOADING CAPACITY	215 Staples
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-2032FL

Combination L Cleat Flooring Nailer

TYPE OF NAIL	L Shape Cleat Nails
GAUGE SIZE	20 GA.
WIDTH X THICKNESS	.075"x.035" (1.90x0.90mm)
COLLATION ANGLE	0°
LENGTH	1"-1 1/4" (25-32mm)
WEIGHT	3.45lbs (1.57kg)
LOAD CAPACITY	240 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

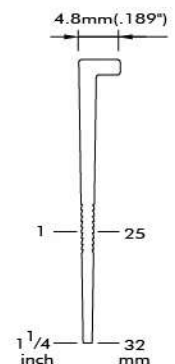

New



FLOORING FASTENING System




Standard



Roller


LFN-50B/LFN-50BR (with Roller System) Combination L and T Cleat Flooring Nailer

TYPE OF NAIL	L and T Shape Cleat Nails
GAUGE SIZE	16GA.
WIDTH X THICKNESS	.118"x.063" (3.00x1.60mm) .063" (1.60mm)
HEAD DIA.	.287" (7.3mm) .236" (6.0mm)
COLLATION ANGLE	0°
LENGTH	1 1/4"-2" (32-50mm)
WEIGHT	8.98lbs (4.08kg)
LOADING CAPACITY	120 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




LFN-50B18/LFN-50B18R (with Roller System) 18 Gauge Industrial Flooring Nailer

TYPE OF NAIL	L Shape Cleat Nails
GAUGE SIZE	18GA.
WIDTH X THICKNESS	.118"x.047" (3.00x1.20mm)
HEAD DIA.	.287" (7.3mm)
COLLATION ANGLE	0°
LENGTH	1 1/4"-2" (32-50mm)
WEIGHT	8.98lbs (4.08kg)
LOADING CAPACITY	120 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



FS-50/FS-50R (with Roller System) 15 1/2" Gauge Industrial Flooring Nailer (Staple Type)

TYPE OF NAIL	Flooring Staples
GAUGE SIZE	15 - 15 1/2GA.
WIDTH X THICKNESS	.075"x.065" (1.90x1.64mm)
CROWN SIZE	1/2" (13.0mm)
COLLATION ANGLE	0°
LENGTH	1 1/4"-2" (32-50mm)
WEIGHT	9.15lbs (4.16kg)
LOADING CAPACITY	130 Staples
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




CONCRETE FASTENING System

(UP TO 50MM CONCRETE NAILER)

PR-1.8 50C

Concrete Nailer




TYPE OF NAIL	Concrete Nails
GAUGE SIZE	15GA.
SHANK	.070" (1.80mm)
HEAD DIA.	.118" (3.0mm)
COLLATION ANGLE	0°
LENGTH	9/16"-2" (15-50mm)
WEIGHT	3.26lbs (1.48kg)
LOADING CAPACITY	77Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PT-2575

Concrete T Nailer

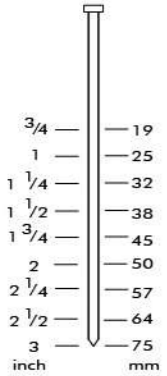


TYPE OF NAIL	Concrete T Nails
GAUGE SIZE	14GA.
SHANK	.086" - .099" (2.20-2.50mm)
HEAD DIA.	.275" (MAX 7.0mm)
COLLATION ANGLE	0°
LENGTH	3/4"-3" (19-75mm)
WEIGHT	6.67lbs (3.03kg)
LOADING CAPACITY	80Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)



PCN-50ST.2

Concrete Coil Nailer

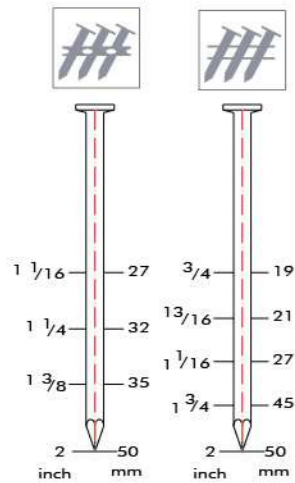


TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.083" - .113" (2.10-2.87mm)
HEAD DIA.	.252" (MAX 6.4mm)
PITCH	7.5-8.0mm
COLLATION ANGLE	15°
LENGTH	3/4"-2" (19-50mm)
WEIGHT	5.48lbs (2.49kg)
LOADING CAPACITY	124-200 Concrete Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



CONCRETE FASTENING System

PT-3040

Concrete Pin Nailer

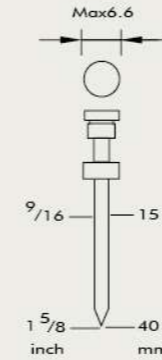


TYPE OF NAIL	Concrete Pins
SHANK	.102" - .118" (2.60-3.00mm)
HEAD DIA.	.260" (MAX 6.6mm)
COLLATION ANGLE	0°
LENGTH	9/16"-1 5/8" (15-40mm)
WEIGHT	6.67lbs (3.03kg)
LOADING CAPACITY	36 Concrete Pins
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)



PCN-670ST

Concrete Pin Nailer

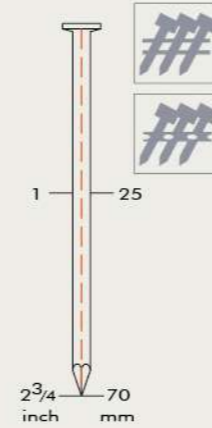


TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.099" - .131" (2.50-3.30mm)
HEAD DIA.	.283" (MAX 7.2mm)
PITCH	7.5-8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2 3/4" (25-70mm)
WEIGHT	6.73lbs (3.06kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-650ST

Concrete Pin Nailer

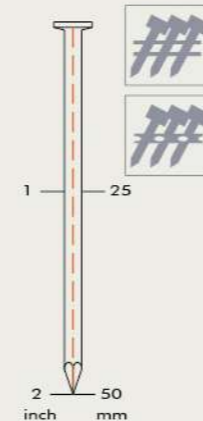

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.099" - .131" (2.50-3.30mm)
HEAD DIA.	.236" - .283" (6.0-7.2mm)
PITCH	7.5-8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2" (25-50mm)
WEIGHT	6.69lbs (3.04kg)
LOADING CAPACITY	150-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)






MULTIPLE / SCREW NAILER




PCN-450DW Concrete Pin Nailer

TYPE OF NAIL	Plastic Sheet Nails
SHANK	.086" - .138" (2.20-3.50mm)
HEAD DIA.	.323" (MAX 8.2mm)
PITCH	7.5-8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2" (25-50mm)
WEIGHT	4.09lbs (1.86kg)
LOADING CAPACITY	200 Nails/Coil Screws
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PRN-50DW Standard Drywall Screw Nailer

TYPE OF NAIL	Plastic Sheet Nails
SHANK	.118" - .161" (3.00-4.10mm)
HEAD DIA.	.338" (MAX 8.6mm)
PITCH	10.0mm
COLLATION ANGLE	15°
LENGTH	1"-2" (25-50mm)
WEIGHT	5.46lbs (2.48kg)
LOADING CAPACITY	150-250 Nails/Coil Screws
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PRN-50 Drywall / Screw Nailer

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.118" - .161" (3.00-4.10mm)
HEAD DIA.	.315" (MAX 8.0mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1"-2" (25-50mm) Wire Welded 1"-2" (25-50mm) Plastic Sheet
WEIGHT	5.68lbs (2.58kg)
LOADING CAPACITY	150-250 Nails/Coil Screws
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

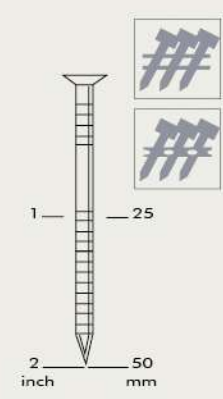


PCN-890H Drywall / Screw Nailer

TYPE OF NAIL	Wire Welded Nails and Plastic Sheet Nails
SHANK	.118" - .161" (3.00-4.10mm)
HEAD DIA.	.338" (MAX 8.6mm)
PITCH	7.5-10.0mm
COLLATION ANGLE	15°
LENGTH	2"-3 1/2" (50-90mm) Wire Welded 2"-3 1/2" (50-90mm) Plastic Sheet
WEIGHT	8.07lbs (3.67kg)
LOADING CAPACITY	150-250 Nails/Coil Screws
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)

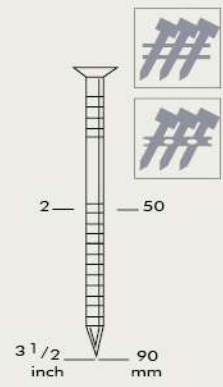


C-RING TOOL / HOG-RING GUN

The lightest C-ringer in the market.




PSC-7 C-Ring Gun

TYPE OF NAIL	C-Ring
GAUGE SIZE	15GA.
SHANK	.069"-.070" (1.75x1.80mm)
CROWN SIZE	15/16"x15/32" (24.0x12.0mm)
CLOSURE SIZE	.311" - .421" (7.9-10.7mm)
WEIGHT	2.60lbs (1.18kg)
LOADING CAPACITY	130 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PSC-7C C-Ring Gun

TYPE OF NAIL	C-Ring
GAUGE SIZE	15GA.
SHANK	.069"-.070" (1.75x1.80mm)
CROWN SIZE	15/16"x15/32" (24.0x12.0mm)
CLOSURE SIZE	.189" - .343" (4.8-8.7mm)
WEIGHT	2.90lbs (1.32kg)
LOADING CAPACITY	130 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PSC-7E (Long Nose) C-Ring Gun

TYPE OF NAIL	C-Ring
GAUGE SIZE	15GA.
SHANK	.069"-.070" (1.75x1.80mm)
CROWN SIZE	15/16"x15/32" (24.0x12.0mm)
CLOSURE SIZE	.311" - .421" (7.9-10.7mm)
WEIGHT	2.57lbs (1.17kg)
LOADING CAPACITY	130 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PSC-660 C-Ring Gun

TYPE OF NAIL	C-Ring
GAUGE SIZE	16GA.
SHANK	.063" (1.60mm)
CROWN SIZE	21/32"-11/32" (16.8x9.0mm)
CLOSURE SIZE	.099" - .138" (2.5-3.5mm)
WEIGHT	2.90lbs (1.32kg)
LOADING CAPACITY	130 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCR-660 C-Ring Gun


TYPE OF NAIL	C-Ring
GAUGE SIZE	16GA.
SHANK	.063" (1.60mm)
CROWN SIZE	21/32"-11/32" (16.8x9.0mm)
CLOSURE SIZE	.099" - .138" (2.5-3.5mm)
WEIGHT	3.54lbs (1.61kg)
LOADING CAPACITY	130 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



SPECIAL FASTENING System


PF-9021D Duplex Nailer

TYPE OF NAIL	Plastic Collated Duplex Nails
SHANK	.113" - .131" (2.87-3.30mm)
HEAD DIA.	.315" (8.0mm)
COLLATION ANGLE	20°
LENGTH	3"-3 1/2" (75-90mm)
WEIGHT	7.99lbs (3.63kg)
LOAD CAPACITY	59 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)




FS-3140 Fence Stapler

TYPE OF NAIL	Fence Staples
GAUGE SIZE	10 1/2 GA.
WIDTH X THICKNESS	.131"-.110"(3.30-2.80mm)
CROWN SIZE	1/2"(12.8mm)
COLLATION ANGLE	0°
LENGTH	1"-2"(25-50mm)
WEIGHT	6.16lbs(2.80kg)
LOADING CAPACITY	75 Fence Staples
OPERATION PRESSURE	80-120psi(5.5-8.3kg/cm ²)




PR-8034M Duplex Nailer

TYPE OF NAIL	Full Round Head Plastic Collated
SHANK	.252" - .264" (6.40-6.70mm)
HEAD DIA.	.472"-.488"(12.0-12.4mm)
COLLATION ANGLE	34°
LENGTH	3 1/8" (80mm)
WEIGHT	14.45lbs (6.57kg)
LOAD CAPACITY	33 Nails
OPERATION PRESSURE	80-120psi (5.5-8.3kg/cm ²)



PR-2380A Special Angle Nailer


TYPE OF NAIL	Angle Nailer
SHANK	.092"(2.30mm)
HEAD DIA.	.131"-.141"(3.33-3.57mm)
COLLATION ANGLE	34°
LENGTH	2"-3 1/8"(50-80mm)
WEIGHT	6.36lbs(2.89kg)
LOADING CAPACITY	100 Nails
OPERATION PRESSURE	70-120psi(4.9-8.3kg/cm ²)



PCN-70CL Clinch Nailer

INDUSTRIAL USING

TYPE OF NAIL	Wire Welded Nails
SHANK	.092" - .118" (2.30-3.00mm)
HEAD DIA.	.220" - .275" (5.6-7.0mm)
PITCH	8.0mm
COLLATION ANGLE	15°
LENGTH	1 3/4"(45mm)
WEIGHT	15.86lbs (7.21kg)
LOADING CAPACITY	225-300 Nails
OPERATION PRESSURE	70-120psi (4.9-8.3kg/cm ²)



ACCESSORIES



SECONDARY SAFETY
For:PR-8100C2
For:PCN-55M2 PRO
For:PCN-70.1

AUTO ACTUATOR ASM



REMOTE FIRE VALVE



TAPPING BLOCK FOR FLOORING



TWO SET NOSE FOR PALLET COIL NAILER (PCN-70)

Hook




Piston Driver



INTERCHANGEABLE WITH MAX / HITACHI / BOSTITCH

BRAND NAME	MODEL	PARTS #
MAX	CN55	MA31866
MAX	CN70	MA31657
MAX	CN80	MA34445
PASLODE	F350S	PA501042
PASLODE	F250S-PP	PA501468
PASLODE	5250-PP	PA401933
PASLODE	3150W16	PA404345
BOSTITCH	RN45B	BO101961
BOSTITCH	RN46	BO149826
BOSTITCH	N70	BO102630
BOSTITCH	N80	BO80157
BOSTITCH	N100	BO100157
BOSTITCH	N400	BO11204-1030001
BOSTITCH	64084	11204-0780009
BOSTITCH	64099	11204-1010001

EXTENDED MAGAZINE

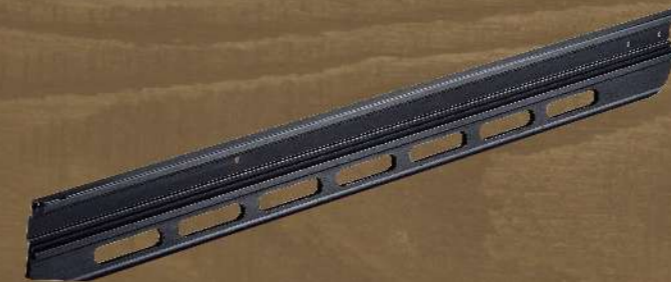

EXTENDED MAGAZINE FOR AUTOMATIC PRE-NAIL MACHINE (4 STRIPS)

For model: PF-0021, PF-0034, PF-9021

BRAND NAME	MODEL	PARTS #
HITACHI	NV45AB2	HI-878156
HITACHI	NR65AK	HI-883471
HITACHI	NR83A2	HI-877323
HITACHI	NR90AD	HI-884957
HITACHI	NR90AE	HI-885519
HITACHI	NV75AG	HI-883980
HITACHI	NR83AA2	HI-883510
HITACHI	NR83A	HI-877323-R
HITACHI	NV83A	HI-878428
HITACHI	N5008AC	HI-883716
HITACHI	NV65AH	HI-882684