

iPanrex®

PANREX INDUSTRIAL CO., LTD.

No. 67, Industrial 20th Road, Tai-Ping City,

(Ta-Li Industrial Park), Taichung, Taiwan

TEL:886-4-2271-4832 FAX:886-4-2271-4833

<http://www.panrex.com.tw>

E-mail:

Panrex-wilchen@panrex.com.tw

panrex@hibox.hinet.net



iPanrex

PNEUMATIC FASTENING TOOLS

www.panrex.com.tw



ISO-9001

ENTER AS CUSTOMER LEAVE AS FRIEND

Panrex is dedicated to advanced technology through extensive research development

Establishing complete fastening system to mark our tools safe, convenient and easy-to-operate is also our target. Through international certificate, panrex has also developed our special Techniques such as the following:



ONE YEAR WARRANTY WILL APPLY TO PANREX TOOL, EXCEPT NORMAL WEARING PARTS.



NAIL-DRIVING WITH SAFETY DEVICE:

Slim nose easy to aim
(U.S.PATENT 6450387)



POWERFUL & EASY CAP RELEASE:

(U.S.PATENT 6651863)



ADJUSTABLE WORK CONTACTING ELEMENT

Depth of drive adjustment by wheel. (U.S.PATENT 6866177)



ONE STEP JAM CLEARANCE:

(PATENT pending)




ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:


No adjustment needed to switch from one to the other.
(U.S. PATENT 6419140, 6357647)
(G.M.PATENT Nr20217706.8)




6 DRY-FIRE LOCK: (U.S. PATENT 7004368)



7 PATENTED DRIVER DESIGN FOR DURABLE USE



8 UNIQUE NAIL GUIDE LOCK AND EASY NAIL LENGTH ADJUSTMENT (PATENT 220112)



9 FAST-CYCLE RATE TO 15 NAILS/SECOND (110Psi)

Index

p01-06

PALLET FASTENING SYSTEM

p07-14

CONSTRUCTION FASTENING SYSTEM

p15-18

FRAMING FASTENING SYSTEM

p19-24

STAPLERS

p25-28

BRADDERS / PIN NAILERS

p29-30

FLOORING FASTENING SYSTEM

p31-34

CONCRETE FASTENING SYSTEM

p35-38

DRYWALL / SCREW FASTENING SYSTEM

p39

SPECIAL FASTENING SYSTEM

p40

ACCESSORIES


PALLET FASTENING System



PR-790P

PALLET COIL NAILER

SHANK	.099"~.148" (2.5~3.8mm)
HEAD DIA.	.236"~.295" (6.0~7.5mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	7.6lbs (3.47kg)
LOAD CAPACITY	150~300 Nails
OPERATING PRESSURE	80~120psi (5.5~8.3kg/cm ²)



PCN-670SA.1

PALLET COIL NAILER

SHANK	.092"~.131" (2.3~3.3mm)
HEAD DIA.	.224"~.275" (5.6~7.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	6.78lbs (3.08kg)
LOAD CAPACITY	225~300 Nails
OPERATING PRESSURE	70~120psi (4.9~8.3kg/cm ²)



PCN-70

PALLET COIL NAILER

SHANK	.092"~.118" (2.3~3.0mm)
HEAD DIA.	.224"~.275" (5.6~7.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	7.47lbs (3.39kg)
LOAD CAPACITY	225~300 Nails
WEIGHT	7.47lbs (3.39kg)
OPERATING PRESSURE	70~120psi (4.9~7.8kg/cm ²)



PCN-70PAL

FOR PALLET MACHINE

SHANK	.092"~.118" (2.3~3.0mm)
HEAD DIA.	MAX. .275" (7.0mm)
COLLATION ANGLE	15° Wire Welded
LOAD CAPACITY	225~300 nails
OPERATING PRESSURE	70~120psi (4.9~8.3kg/cm ²)




PCN-70A2

FOR PALLET MACHINE

2 SET NOSE DESIGN WITH METAL INSERT FOR REPLACE AS THE HEAD OF NOSE WEARS	
SHANK	.092"~.118" (2.3~3.0mm)
HEAD DIA.	.224"~.275" (5.6~7.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	7.47lbs (3.39kg)
LOAD CAPACITY	225~300 Nails
OPERATING PRESSURE	70~120psi (4.9~8.3kg/cm ²)



PALLET FASTENING System

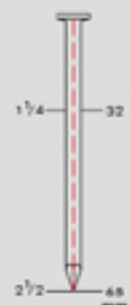


PCN-65H.1
PALLET COIL NAILER

SHANK	.092"-.113" (2.3-2.87mm)
HEAD DIA.	MAX. .283" (7.2mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.79 lbs (2.63kg)
LOAD CAPACITY	225-300 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-65.1
PALLET COIL NAILER

SHANK	.083"-.099" (2.1-2.5mm)
HEAD DIA.	.252" (MAX. 6.4mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.79 lbs (2.63kg)
LOAD CAPACITY	300-350 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-55
PALLET COIL NAILER

SHANK	.083"-.099" (2.1-2.5mm)
HEAD DIA.	.189"-.236" (4.8-6.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.5lbs (2.5kg)
LOAD CAPACITY	300-350 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-55M.1
PALLET COIL NAILER

SHANK	.083"-.099" (2.1-2.5mm)
HEAD DIA.	.189"-.236" (4.8-6.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.3lbs (2.4kg)
LOAD CAPACITY	300-350 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)





ADJUSTABLE AIR DEFLECTOR

BUILT-IN SOUND REDUCER
Low noise and vibration

POWERFUL
Driving power: 600 inch-lbs

ERGONOMIC DESIGN
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size.

FAST-CYCLE RATE TO 15 NAILS/SECOND (110Psi)

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other.
(U.S. PATENT 6419140)

ADJUSTABLE WORK CONTACTING ELEMENT
Depth of drive adjustment by wheel.
(U.S. PATENT 6866177)

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.



EASY DIAL NAIL SIZE ADJUSTMENT
(R.O.C. PATENT 220112)




EXCLUSIVE NOZZLE TIP TO FIT SIDING DECKING OPERATION

CONSTRUCTION FASTENING SYSTEM

APPLICATION


SIDING / FENCING / EXTERIOR TRIM / SHEATHING
SUBFLOORS / ROOF DECKING / EXTERIOR DECK
FURRING / STRAPPING

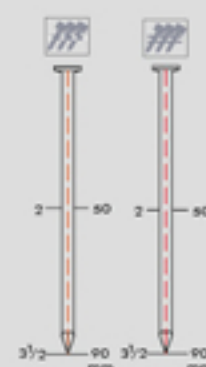

PCN-790H PRO-COIL NAILER




SHANK	.099"-.150" (2.5-3.8mm)
HEAD DIA.	.303" (MAX. 7.7mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	8.03 lbs (3.65kg)
LOAD CAPACITY	150-300 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

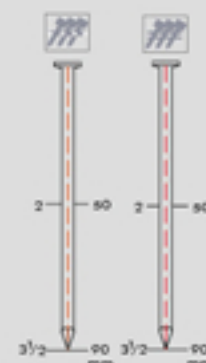


PCN-790S PRO-COIL NAILER

SHANK	.099"-.148" (2.5-3.8mm)
HEAD DIA.	.236"-.295" (6.0-7.5mm)
COLLATION ANGLE	15° Wire Welded and sheet collated
WEIGHT	7.6lbs (3.48kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

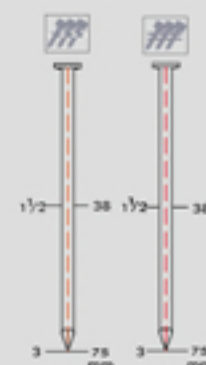

PCN-675S PRO-COIL NAILER

SHANK	.092"-.131" (2.3-3.3mm)
HEAD DIA.	.275" (MAX. 7.0mm)
COLLATION ANGLE	15° wire welded and Sheet Collated
WEIGHT	6.82 lbs (3.1kg)
LOAD CAPACITY	225-300 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-670SA PRO-COIL NAILER

SHANK	.092"-.131" (2.3-3.3mm)
HEAD DIA.	.275" (MAX. 7.0mm)
COLLATION ANGLE	15° wire welded and Sheet Collated
WEIGHT	6.78 lbs (3.08kg)
LOAD CAPACITY	225-300 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




CONSTRUCTION FASTENING System

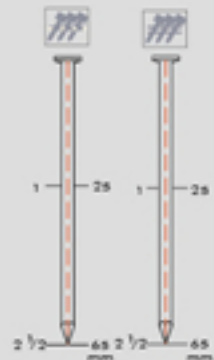

PR-565H
PRO-COIL NAILER

SHANK	.092"-.113" (2.3-2.87mm)
HEAD DIA.	.275" (MAX. 7.0mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.50 lbs (2.50kg)
LOAD CAPACITY	250-400 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

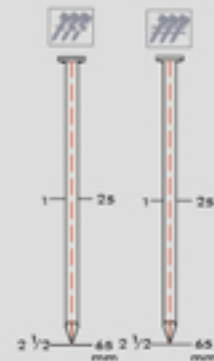


PCN-565S
PRO-COIL NAILER

SHANK	.092"-.113" (2.3-2.87mm)
HEAD DIA.	.197"-.236" (5.0-6.0mm)
COLLATION ANGLE	15° wire welded and sheet collated
WEIGHT	5.5lbs (2.5kg)
LOAD CAPACITY	250-400 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-557S
PRO-COIL NAILER

SHANK	.083"-.092" (2.1-2.3mm)
HEAD DIA.	.189"-.224" (4.8-5.6mm)
COLLATION ANGLE	15° Wire Welded and sheet collated
WEIGHT	5.3lbs (2.4kg)
LOAD CAPACITY	250-400Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

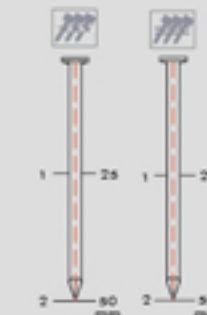

PCN-50ST
CONICAL NAILER

SHANK	.083"-.113" (2.1-2.87mm)
HEAD DIA.	.244" (MAX 6.2mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.46 lbs (2.48kg)
LOAD CAPACITY	150-300 Concrete Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-945P
PRO-ROOFING COIL NAILER

SHANK	.120" (3.05mm)
HEAD DIA.	.413" (10.5mm)
COLLATION ANGLE	15°
WEIGHT	5.55lbs (2.52kg)
LOAD CAPACITY	120 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-32
PRO-COIL NAILER

SHANK	.079"-.086" (2.0-2.2mm)
HEAD DIA.	.169"-.189" (4.3-4.8mm)
COLLATION ANGLE	0° Wire Welded
WEIGHT	2.78lbs (1.26kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)





ADJUSTABLE WORK CONTACTING ELEMENT
Depth of drive adjustment element on the tool.

LIGHTEST

POWERFUL AND EASY CAP RELEASE
(U.S. PATENT 6651863)

FAST-CYCLE RATE TO 10 NAILS/SECOND (110Psi)

SAFETY LOCK-OUT MECHANISM
Tool will not fire unless more than three nails are in the magazine

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.

ERGONOMIC DESIGN
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size

FRAMING FASTENING SYSTEM *TOP Loading*

APPLICATION

FRAMING / WALL SHEATHING /
ROOF SHEATHING / FLOOR DECKING /
BLOCKING SUBASSEMBLIES




PUSHER & FOLLOWER PROTECTOR DESIGN



TOP LOADING 21 Degree PR-16021 PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	14.99lbs (6.8kg)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.148"-.197" (3.8-5.0mm)
FASTENERS LENGTH	100-160mm (4"-6 1/4")
CAPACITY	55-60 Nails
MAGAZINE LOADING	TOP



TOP LOADING 21 Degree PR-13021 PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	13.42lbs (6.1kg)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.131"-.161" (2.87-4.1mm)
FASTENERS LENGTH	90-130mm (3 1/4"-5 1/8")
CAPACITY	55 Nails
MAGAZINE LOADING	TOP



FRAMING FASTENING System



TOP Loading 21 Degree
PR-9021P

PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	7.96lbs (3.62kg)
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.113"~.161" (2.87~4.1mm)
FASTENERS LENGTH	50-90mm (2"~3 1/2")
CAPACITY	66 Nails



TOP LOADING 21 Degree

PR-0021P

PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	8lbs (3.65kg)
TOOL HEIGHT	14.3" (363mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.113"~.161" (2.87~4.1mm)
FASTENERS LENGTH	60-100mm (2 3/8"~4")
CAPACITY	66 Nails



TOP Loading 34 Degree

PR-0034P

PRO-FRAMING NAILER

TYPE OF NAIL	Clipped Head Paper Collated
MAGAZINE ANGLE	31°
WEIGHT	7.74lbs (3.52kg)
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.113"~.148" (2.87~3.8mm)
FASTENERS LENGTH	50-100mm (2"~4")
CAPACITY	90 Nails



TOP Loading 17 Degree

PR-9017P

PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	17°
WEIGHT	7.96bs (3.62kg)
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.113"~.133" (2.87~3.4mm)
FASTENERS LENGTH	50-90mm (2 3/8"~3 1/2")
CAPACITY	55 Nails



POWERFUL AND LIGHTEST
Driving power : 1100 inch-lbs

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.

ERGONOMIC DESIGN
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size

**REAR LOADING AND
PUSHER PROTECTOR
DESIGN.**

**ANTI-DOUBLE FIRE MECHANISM,
SINGLE OR CONTACT FIRING:**
No adjustment needed to switch from one to the other.(U.S. PATENT 6419140)

SAFETY LOCK-OUT MECHANISM
Tool will not fire unless more than three nails are in the magazine

**ADJUSTABLE WORK
CONTACTING ELEMENT**

FAST & EASY LOADING
By pass pusher for fast, easy one-step loading.

**FAST-CYCLE RATE TO 10
NAILS / SECOND (110Psi)**

FRAMING FASTENING SYSTEM

APPLICATION

FRAMING / WALL SHEATHING
ROOF SHEATHING / FLOOR DECKING
/ BLOCKING SUBASSEMBLIES



PF-0021P




REAL LOADING 21 Degree

PF-0021

PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	7.9lbs (3.59kg)
TOOL HEIGHT	14.3" (363mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.113"~.161" (2.87~4.1mm)
FASTENERS LENGTH	50-100mm (2"~4")
CAPACITY	66 Nails



REAL LOADING 21 Degree

PF-9021

PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	7.70lbs (3.50kg)
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.113"~.131" (2.87~3.3mm)
FASTENERS LENGTH	50-90mm (2"~3 1/2")
CAPACITY	66 Nails



REAL LOADING 34 Degree


PF-0034

PRO-FRAMING NAILER

TYPE OF NAIL	Clipped Head Paper Collated
MAGAZINE ANGLE	31°
WEIGHT	7.6lbs (3.47kg)
TOOL HEIGHT	14.3" (363mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK DIA.	.113"~.148" (2.87~3.8mm)
FASTENERS LENGTH	50-100mm (2"~4")
CAPACITY	90 Nails



FRAMING FASTENING System

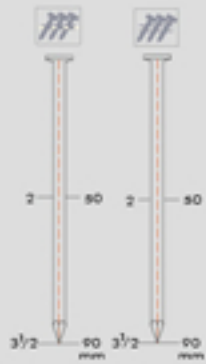


PCN-790S
Framing Coil Nailer

SHANK	.099"~.148" (2.5-3.8mm)
HEAD DIA.	.236"~.295" (6.0-7.5mm)
COLLATION ANGLE	15° Wire Welded and sheet collated
WEIGHT	7.6lbs (3.48kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



EASY SIDE LOADING

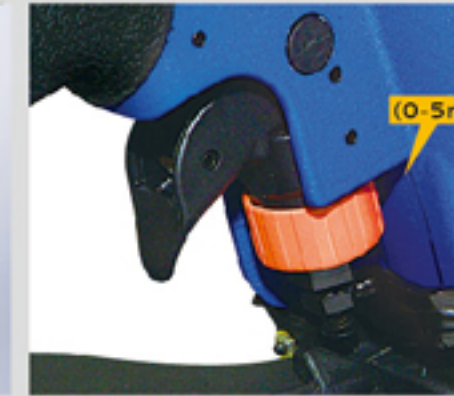

ADJUSTABLE WORK CONTACTING ELEMENT
Depth of drive adjustment by wheel.



SAFETY TRIGGER LOCK LEVEL



PCN-790H
Framing Coil Nailer

SHANK	.099"~.150" (2.5-3.8mm)
HEAD DIA.	.303" (MAX. 7.7mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	8.03 lbs (3.65kg)
LOAD CAPACITY	150-300 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



POWERFUL AND PATENTED
DRIVER DESIGN FOR DURABLE USE

ADJUSTABLE
AIR DEFLECTOR

LOW NOISE AND
LOW VIBRATION

FAST-CYCLE RATE TO
15 NAILS/SECOND (110Psi)

ANTI-DOUBLE FIRE MECHANISM,
SINGLE OR CONTACT FIRING:
No adjustment needed to switch from
one to the other. (U.S. PATENT 6419140)

LIGHTEST
ONLY 4.8lbs(2.18kg)

FOR FLOORING TIP



ONE STEP JAM CLEARANCE
(PATENT PENDING)



SLIM SAFETY LEVER FOR SELECT



ADJUSTABLE WORK
CONTACTING ELEMENT
Depth of drive adjustment
element on the tool.

DURABLE AND RELIABLE:
Rugged design will stand up to
the demands of the job in
any kind of weather.

EASY LOADING AND
PUSHER PROTECTOR
DESIGN (PATENT PENDING)



STAPLER

APPLICATION

SHEATHING / SUBFLOORING / ROOF DECKING
FURNITURE FRAMES / PALLETS / VINYL SIDING
CRATE AND BOX ASSEMBLY



FOR FLOORING TIP

(TWO IN ONE)

PR-15884Q

PRO-MEDIUM CROWN STAPLER



GAUGE SIZE	16GA-N	15GA-Q
CROWN SIZE	7/16" (10.6~11.2mm)	7/16" (11.2mm)
WIDTH X THICKNESS	.063"x.055" (1.6x1.4mm)	.075"x.067" (1.9x1.7mm)
WEIGHT	6.2lbs (2.8kg)	6.2lbs (2.8kg)
LOAD CAPACITY	147 Staples	130 Staples
OPERATING PRESSURE	80~120psi (5.5-8.3kg/cm ²)	80~120psi (5.5-8.3kg/cm ²)

PS-16851C

PRO-MEDIUM CROWN STAPLER



GAUGE SIZE	16GA
CROWN SIZE	7/16" (10.6~11.2mm)
WIDTH X THICKNESS	.063"x.055" (1.6x1.4mm)
WEIGHT	4.73lbs (2.15kg)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	80~120psi (5.5-8.3kg/cm ²)



PR-16851P

PRO-MEDIUM CROWN STAPLER



GAUGE SIZE	16GA
CROWN SIZE	7/16" (10.6~11.2mm)
WIDTH X THICKNESS	.063"x.055" (1.6x1.4mm)
WEIGHT	4.8lbs (2.18kg)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	80~120psi (5.5-8.3kg/cm ²)



STAPLER

Narrow Crown Stapler & Fine Wire Stapler

PS-16951C

PRO-MEDIUM CROWN STAPLER



GAUGE SIZE	16GA
CROWN SIZE	1/2" (12.2~12.7mm)
WIDTH X THICKNESS	.063"x.055" (1.6x1.4mm)
WEIGHT	4.73lbs (2.15kg)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	80~120psi (5.5-8.3kg/cm ²)



PR-16951P

PRO-MEDIUM CROWN STAPLER



GAUGE SIZE	16GA
CROWN SIZE	1/2" (12.2~12.7mm)
WIDTH X THICKNESS	.063"x.055" (1.6x1.4mm)
WEIGHT	4.8lbs (2.18kg)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	80~120psi (5.5-8.3kg/cm ²)



PR-9040P

NARROW CROWN STAPLER


GAUGE SIZE	18GA
CROWN SIZE	1/4" (5.8mm)
WIDTH X THICKNESS	.050"x.039" (1.25x1.0mm)
WEIGHT	2.9lbs (1.3kg)
LOAD CAPACITY	100 Staples
OPERATING PRESSURE	70~120psi (4.9-8.3kg/cm ²)



PR-9240P

NARROW CROWN STAPLER

GAUGE	18 GA.
CROWN SIZE	5/16" (8.6mm)
WIDTH X THICKNESS	.050"x.039" (1.25x1.0mm)
WEIGHT	2.75 lbs (1.25kg)
LOAD CAPACITY	100 Staples
OPERATING PRESSURE	70~120psi (4.9-8.3kg/cm ²)



M32S (18GAUGE)

NARROW CROWN STAPLER

NAIL LENGTH	min 5/16"-1-1/4" (8-32mm)
CROWN SIZE	3/8" (10mm)
WIDTH	1.26mm
THICKNESS	1.04mm
WEIGHT	1kg
CAPACITY	100 Staples
OPERATING PRESSURE	70~110psi (5-7bar)




STAPLER

Narrow Crown Stapler & Fine Wire Stapler

M40S (18GAUGE)

NARROW CROWN STAPLER



NAIL LENGTH	min 5/8" - 1-5/8" (16-40mm)
CROWN SIZE	3/8" (10mm)
WIDTH	1.26mm
THICKNESS	1.04mm
WEIGHT	1.2kg
CAPACITY	100 staples
OPERATING PRESSURE	70-110psi (5-7bar)



8016A (21GAUGE)

FINE WIRE STAPLER




NAIL LENGTH	1/4" - 5/8" (6-16mm)
CROWN SIZE	12.9mm
NAIL WIDTH	0.95mm
NAIL THICKNESS	0.65mm
TOOL WEIGHT	2lbs (0.9kgs)
CAPACITY	100 staples
OPERATING PRESSURE	70-110psi (5-7bar)



8016ALM (21GAUGE)

FINE WIRE STAPLER




NAIL LENGTH	1/4" - 5/8" (6-16mm)
CROWN SIZE	12.9mm
NAIL WIDTH	0.95mm
NAIL THICKNESS	0.65mm
TOOL WEIGHT	2lbs (0.9kgs)
CAPACITY	270 staples
OPERATING PRESSURE	70-110psi (5-7bar)



7116A (22GAUGE)

FINE WIRE STAPLER



NAIL LENGTH	1/4" - 5/8" (6-16mm)
CROWN SIZE	9.1mm
NAIL WIDTH	0.75mm
NAIL THICKNESS	0.6mm
TOOL WEIGHT	2lbs (0.9kgs)
CAPACITY	150 staples
OPERATING PRESSURE	70-110psi (5-7bar)



7116ALM (22GAUGE)

FINE WIRE STAPLER



NAIL LENGTH	1/4" - 5/8" (6-16mm)
CROWN SIZE	9.1mm
NAIL WIDTH	0.75mm
NAIL THICKNESS	0.6mm
TOOL WEIGHT	2lbs (0.9kgs)
CAPACITY	400 staples
OPERATING PRESSURE	70-110psi (5-7bar)






BRADDER/ PIN NAILER SYSTEM


APPLICATION

DOOR AND WINDOW CASING / PANEL ASSEMBLY
FURNITURE FRAMES TRIM / INTERIOR AND EXTERIOR TRIM
BUTT JOINTS CABINETS




PR-1684T 16GA. FINISH NAILER

GAUGE SIZE	16 GA.
LENGTH	3/4"-2 1/2" (20-65mm)
WIDTH X THICKNESS	.063"x.055" (1.6x1.4mm)
WEIGHT	3.52lbs (1.6kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



(UP TO 50MM FINISH NAILER) PR-1650 16GA. FINISH NAILER

GAUGE SIZE	16 GA.
LENGTH	5/8"-2" (15-50mm)
WIDTH X THICKNESS	.063"x.055" (1.6x1.4mm)
WEIGHT	3.1lbs (1.4kg)
LOAD CAPACITY	50 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-1850F 18GA. FINISH NAILER

GAUGE SIZE	18 GA.
LENGTH	5/8"-2" (15-50mm)
WIDTH X THICKNESS	.050"x.039" (1.25x1.0mm)
WEIGHT	3.08lbs (1.4kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-1845 18GA. FINISH NAILER

GAUGE	18 GA.
LENGTH	5/8"-1 3/4" (15-45mm)
WIDTH X THICKNESS	.050"x.039" (1.25x1.0mm)
WEIGHT	2.53 lbs (1.15kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




UNIQUE DRY-FIRE LOCK DESIGN
(U.S. PATENT 7004368)

Bradder/ Pin Nailer System

PR-2145S

21GA. MINI TIP NAILER



GAUGE SIZE	21 GA.
LENGTH	5/8"-1-3/4" (15-45mm)
WIDTH X THICKNESS	Ø 0.84mm (0.033")
WEIGHT	2.53lbs (1.15kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	60-100psi (4.2-7.0kg/cm²)



PR-2345S

23GA. PIN NAILER




GAUGE SIZE	23 GA.
LENGTH	5/8"-1-3/4" (15-45mm)
SHANK DIA	Ø 0.64mm (0.025")
WEIGHT	2.53lbs (1.15kg)
LOAD CAPACITY	200 Nails
OPERATING PRESSURE	60-100psi (4.2-7.0kg/cm²)



PR-1550A

Angled Bradder




GAUGE	15 GA.
COLLATION ANGLE	26°
LENGTH	3/4"-2" (20-50mm)
WIDTH X THICKNESS	.075"x.063" (1.9x1.6mm)
WEIGHT	3.08 lbs (1.40kg)
LOAD CAPACITY	86 Angled Brads
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)



PR-1650A

Angled Bradder




GAUGE	16 GA.
COLLATION ANGLE	26°
LENGTH	3/4"-2" (20-50mm)
WIDTH X THICKNESS	.063"x.055" (1.60x1.4mm)
WEIGHT	3.08 lbs (1.40kg)
LOAD CAPACITY	100 Angled Brads
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)



PR-1850A

Angled Bradder




GAUGE	18 GA.
COLLATION ANGLE	26°
LENGTH	3/4"-2" (20-50mm)
WIDTH X THICKNESS	.050"x.039" (1.25x1.0mm)
WEIGHT	3.08 lbs (1.40kg)
LOAD CAPACITY	128 Angled Brads
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)



FLOORING FASTENING SYSTEM

APPLICATION HARDWOOD FLOORING

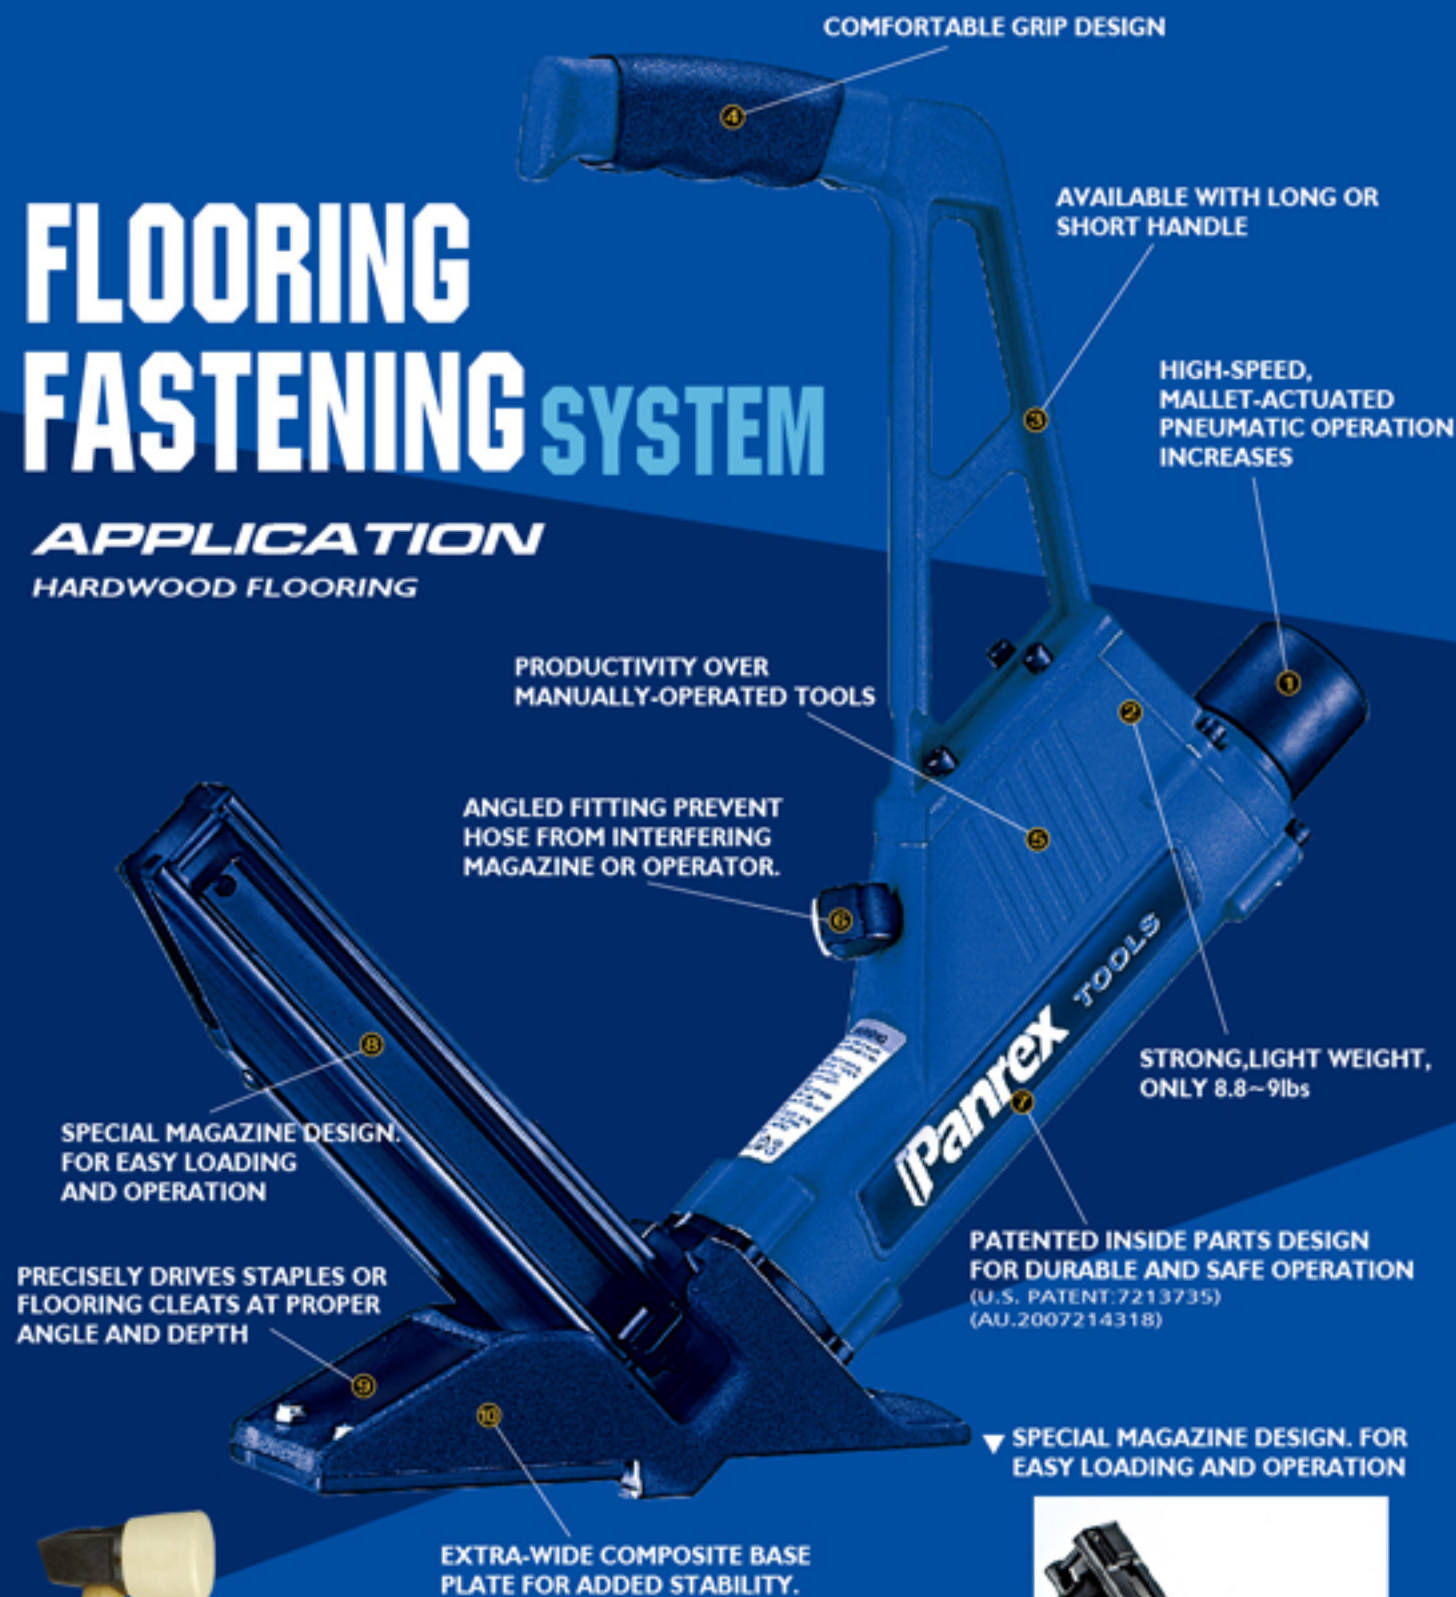

MALLET AND SERVICE PARTS BAG INCLUDED

ACCESSORY



2 IN 1 (CLEAT & TNAIL) LFN-50B

TYPE OF NAIL	L SHAPE & T SHAPE CLEAT
GAUGE	16 GA.
LENGTH	32-50mm (1 1/4"-2")
WEIGHT	4.0kg (8.8 lbs)
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)
LOAD CAPACITY	110 Nails



LFN-50B18

TYPE OF NAIL	L SHAPE CLEAT
GAUGE	18 GA.
LENGTH	32-50mm (1 1/4"-2")
WEIGHT	4.0kg (8.8 lbs)
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)
LOAD CAPACITY	100 Nails



FS-50

TYPE OF NAIL	FLOORING STAPLE
GAUGE	15 GA.
CROWN	13mm (1/2")
LENGTH	32-50mm (1 1/4"-2")
WEIGHT	4.1kg (9.02 lbs)
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)
LOAD CAPACITY	90 Staples




CONCRETE FASTENING SYSTEM

(UP TO 50MM CONCRETE NAILER)

PR-1.8 50C

CONCRETE NAILER




FASTENER TYPE	15GA
LENGTH	5/8"-2" (15-50mm)
SHANK DIA	.070" (1.8mm)
HEAD SIZE	3.0 x 1.8mm
WEIGHT	3.1lbs (1.4kg)
MAGAZINE CAPACITY	50 Nails
MAGAZINE LOADING	Side
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)



PT-2575

CONCRETE T NAILER



TYPE OF NAIL	14 GA. T nails
LENGTH	3/4"-3" (19-75mm)
SHANK DIA.	.086"-.098" (2.2-2.5mm)
HEAD DIA.	MAX. 276" (7.0mm)
WEIGHT	6.56 lbs (2.98kg)
MAGAZINE CAPACITY	80 Nails
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm²)

CONCRETE FASTENING System



PT-3040
CONCRETE PIN NAILER




TYPE OF NAIL	Concrete Pins
LENGTH	1 9/32"-19/16" (15-40mm)
SHANK DIA.	.102"-.118" (2.6-3.0mm)
HEAD DIA.	MAX. 260" (.66mm)
WEIGHT	6.42 lbs (2.92 kg)
OPERATING PRESSURE	80-120psi(5.5-8.3kg/cm ²)



PCN-50ST
CONCRETE COIL NAILER

SHANK	.083"-.113" (2.1-2.87mm)
HEAD DIA.	MAX. .244" (6.2mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.46 lbs (2.48kg)
LOAD CAPACITY	150-300 Concrete Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

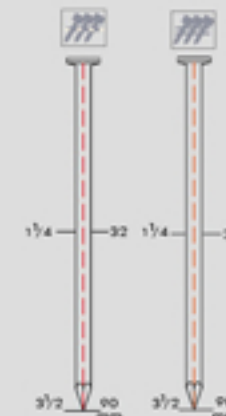

PCN-790H
CONCRETE COIL NAILER


SHANK	.099"-.150" (2.5-3.8mm)
HEAD DIA.	MAX. .303" (7.7mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	8.03 lbs (3.65kg)
LOAD CAPACITY	120-300 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-670ST
CONCRETE COIL NAILER

SHANK	.099"-.150" (2.5-3.8mm)
HEAD DIA.	MAX. .299" (7.6mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	6.78 lbs (3.08kg)
LOAD CAPACITY	150-300 nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



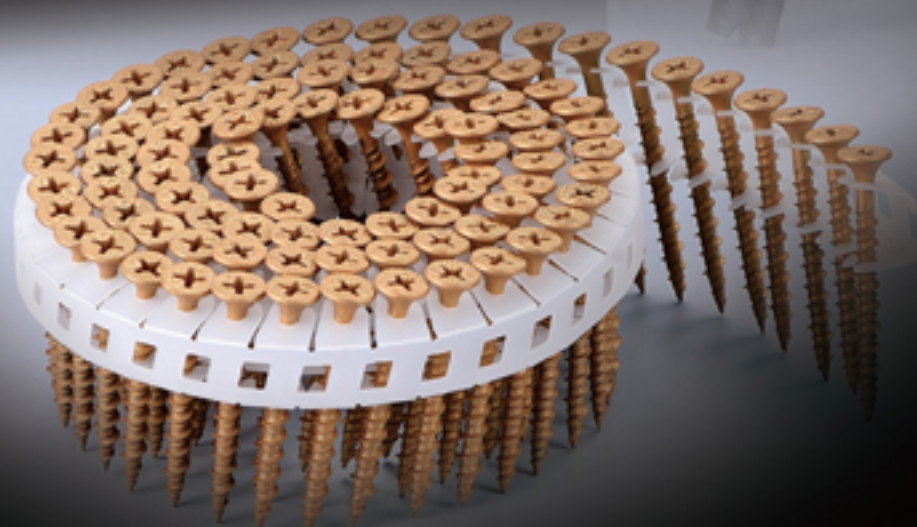


DRYWALL/ SCREW FASTENING SYSTEM

Drywall/ Screw Fastening System




PCN-450DW

Drywall/Screw Fastening System



SHANK	2.5-3.5mm (.099"-.138")
LENGTH	1"-2" (25-50mm)
HEAD DIA.	MAX. 8.2mm (.323")
COLLATION ANGLE	15° Sheet Collated
WEIGHT	1.93kg (4.25 lbs)
LOAD CAPACITY	200 nails/ coil screws
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

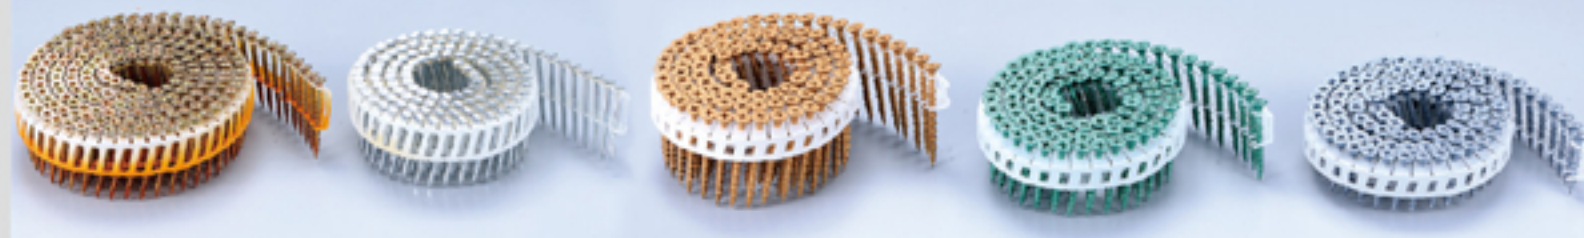

PRN-50DW

Drywall/Screw Fastening System



SHANK	.118"-.161" (3.0mm-4.1mm)
LENGTH	1"-2" (25-50mm)
HEAD DIA.	MAX. .338" (8.6mm)
COLLATION ANGLE	15° Sheet Collated
WEIGHT	5.68 lbs (2.58kg)
LOAD CAPACITY	150-250 nails/ coil screws
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PRN-50

Drywall/Screw Fastening System




SHANK	.118"-.161" (3.0mm-4.1mm)
LENGTH	1"-2" (25-50mm)
HEAD DIA.	MAX. .315" (8.0mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.68 lbs (2.58kg)
LOAD CAPACITY	150-250 nails/ coil screws
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-890H

Drywall/Screw Fastening System



SHANK	.118"-.161" (3.0mm-4.1mm)
LENGTH	2"- 3 1/2" (50-90mm)
HEAD DIA.	MAX. .338" (8.6mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	8.03 lbs (3.65kg)
LOAD CAPACITY	150-250 nails/ coil screws
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



SPECIAL FASTENING SYSTEM

PF-9021D DUPLIX NAILER

TYPE OF NAIL	Collated Duplex Nail
MAGAZINE ANGLE	20°
WEIGHT	3.50kg (7.70 lbs)
SHANK DIA.	2.87-3.3mm (.113"-.131")
FASTENERS LENGTH	50-90mm (2"-3 1/2")
CAPACITY	66 Nails
TOOL HEIGHT	356mm (14")
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm²)



PF-3140 FENCE STAPLER

TYPE OF NAIL	FENCE STAPLE
GAUGE SIZE	3.15mm (10 1/2 GA.)
WEIGHT	2.86kg (6.3 lbs)
CAPACITY	52 Fence Staples
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm²)



PCR-880 C-RING GUN

GAUGE SIZE:	16 GA.
CROWN:	16.8mmx9mm
SHANK:	1.6mm
CLOSURE SIZE	2.5-3.5mm
WEIGHT	3.52lbs (1.7kg)
LOAD CAPACITY	130 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)



ACCESSORIES



Max / Hitachi /
Bostitch Piston Driver
Assembly Parts For
The Replacement

BRAND NAME	MODEL	PARTS #
MAX	CN55	MA31866
MAX	CN70	MA31657
MAX	CN80	MA34445
PASLODE	F350S	PA501042
PASLODE	F250S-PP	PA501468
PASLODE	5250-PP	PA401933
PASLODE	3150W16	PA404345
BOSTITCH	RN45B	BO101961
BOSTITCH	RN46	BO149826
BOSTITCH	N70	BO102630
BOSTITCH	N80	BO80157
BOSTITCH	N100	BO100157
BOSTITCH	N400	BO11204-1030001
BOSTITCH	64084	11204-0780009
BOSTITCH	64099	11204-1010001

BRAND NAME	MODEL	PARTS #
HITACHI	NV45AB2	HI-878156
HITACHI	NR65AK	HI-883471
HITACHI	NR83A2	HI-877323
HITACHI	NR90AD	HI-884957
HITACHI	NR90AE	HI-885519
HITACHI	NV75AG	HI-883980
HITACHI	NR83AA2	HI-883510
HITACHI	NR83A	HI-877323-R
HITACHI	NV83A	HI-878428
HITACHI	N5008AC	HI-883716
HITACHI	NV65AH	HI-882684

▼ REMOTE FIRE VALVE FOR COIL NAILER



REMOTE FIRE VALVE

TWO SET NOSE FOR PALLET
COIL NAILER (PCN-70)

▼ TOOL BAG

ENVIRONMENTAL AND CONVENIENCE
POLYESTER CARRYING TOOL BAG



IT IS USE FOR
COIL NAILER

- PCN-565P
- PR-8100P
- PR-945P
- PCN-7905
- PR-557P
- PCN-6705
- PR-565P
- PCN-5575
- PR-670P
- PR-790P
- PR-15864Q



FULL ROUND HEAD PLASTIC
COLLATED FRAMING NAILER
FOR LONG MAGAZINE (4 STRIPS)